

## PATENT ABSTRACTS OF JAPAN

(11)Publication number : 08-154352

(43)Date of publication of application : 11.06.1996

(51)Int.Cl.

H02K 3/26  
H02K 21/24

(21)Application number : 06-315919

(71)Applicant : SONY CORP

(22)Date of filing : 25.11.1994


(72)Inventor : KUSAKI KENJI

**(54) SMALL SIZE MOTOR**

**(57)Abstract:**

**PURPOSE:** To provide a small size motor in which drive coils are formed in small sizes with high precision and which can obtain a sufficient motor torque.

**CONSTITUTION:** A small size motor 10 has a stator board 16 which is fixed and has drive coils 17 at least on one of its surfaces and a disc rotor 14 which is supported to rotate freely and to face the stator board 16 and is so magnetized as to have a plurality of poles. In the small size motor like this, the drive coils 17 are composed of a plurality of pattern layers formed on one of the surfaces of the stator board by a photolithography method.

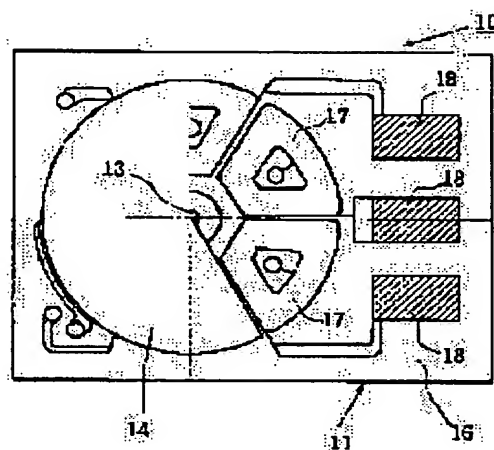

## LEGAL STATUS

**[Date of request for examination]**

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

**[Date of final disposal for application]**

[Patent number]

[Date of registration]

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

**BEST AVAILABLE COPY**

Copyright (C); 1998,2003 Japan Patent Office

\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

CLAIMS

---

[Claim(s)]

[Claim 1] The small motor characterized by to be formed with the pattern of two or more layers which has disc-like Rota equipped with the magnet which counters the stator substrate with which it is placed in a fixed position, and the coil for a drive is prepared in one [ at least ] field, and this stator substrate, and is supported pivotable, and is magnetized by the multi-electrode, and by which the above-mentioned coil for a drive was formed in the whole surface of the above-mentioned stator substrate by the photolithography method in the small motor.

[Claim 2] The small motor according to claim 1 by which the pattern of the above-mentioned two or more layers is characterized by carrying out connection mutually as one group.

[Claim 3] The small motor according to claim 1 by which the pattern of the above-mentioned two or more layers is divided into two or more groups, and each group's pattern is characterized by carrying out connection mutually.

[Claim 4] The small motor according to claim 3 by which one group's pattern is characterized by being used for location detection and/or speed detection among two or more above-mentioned groups' patterns.

[Claim 5] A small motor given in any of claims 1-4 which are characterized by forming the York layer for a magnetic-path configuration on the above-mentioned stator substrate they are.

[Claim 6] The small motor given in any of claims 1-5 they are by which the pattern formed on the above-mentioned stator substrate is characterized by consisting of the magnetic substance.

---

[Translation done.]

## \* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.
2. \*\*\* shows the word which can not be translated.
3. In the drawings, any words are not translated.

---

## DETAILED DESCRIPTION

---

### [Detailed Description of the Invention]

[0001]

[Industrial Application] This invention relates to the small motor which has a stator substrate, disc-like Rota, and the coil for a drive arranged by this stator substrate.

[0002]

[Description of the Prior Art] Conventionally, such a small motor is constituted as shown in drawing 16. That is, in drawing 16, the small motor 1 consists of the flat stator 2, bearing 3a and 3b prepared near the core of this stator 2, a revolving shaft 4 supported by this bearing 3a and 3b pivotable, and Rota 5 fixed to this revolving shaft 4.

[0003] It consists of oil impregnation metal, lubricative resin, etc. so that this bearing 3a may support a revolving shaft 4 in the direction of a path, and bearing 3b is constituted as thrust bearing so that a revolving shaft may be supported to shaft orientations.

[0004] Above-mentioned Rota 5 has annular Rota magnet 5a attached in the inferior surface of tongue while being arranged so that the whole surface (in the case of illustration top face) of a stator 2 may be countered.

[0005] Here, multi-electrode magnetization of the Rota magnet 5a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0006] On the other hand, the stator 2 is equipped with stator substrate 2b laid on base 2a. This stator substrate 2b has circuit elements, such as two or more coils 6 for a drive arranged by the equiangular distance along with the circumferential direction, and a hall device which is not illustrated, resistance, a capacitor, so that each magnetic pole of this Rota magnet 5a may be countered, while being formed by the griddle, the magnetic steel sheet, etc. so that it may act as fixed York for example.

[0007] Thus, according to the constituted small motor 1, the field generated in this coil 6 for a drive acts to N poles each and the south pole of Rota magnet 5a by energizing to each coil 6 for a drive on stator substrate 2b, respectively. Thereby, Rota 5 carries out a rotation drive around a revolving shaft 4.

[0008]

[Problem(s) to be Solved by the Invention] By the way, downsizing and miniaturization are advanced in all the goods fields in recent years, and the request of a miniaturization and thin-shape-izing is becoming still stronger also about the small motor used as a driving source of various devices.

[0009] Therefore, in miniaturizing, in the above small motors 1, thin shape-ization of the coil 6 for a drive is especially needed. for this reason, in order to produce the thin coil for a drive, the coil was really fabricated at the resin base — flexible — a printed coil — it is possible to use a product.

[0010] However, this flexible printed coil needs to form the coil for a drive in both sides of the resin base with an electric conduction pattern, when it thin-shape-izes more, but in forming the coil for a drive in both sides, it is in the middle of manufacture, and it is necessary to reverse the resin base. Therefore, there is a problem that positioning of the coil for a drive to both sides of the resin base becomes difficult.

[0011] On the other hand, when forming the coil for a drive only in the whole surface of the resin base, from the point of the width of face of an electric conduction pattern, the number of turns of the coil for a drive will decrease, and motor torque will fall. Moreover, when the electric conduction pattern was made detailed, the electric resistance of an electric conduction pattern increased, the current which flows the coil for a drive decreased, and there was a problem that motor torque will fall.

[0012] This invention aims at offering the small motor by which sufficient motor torque was acquired while the coil for a drive is formed small and with high precision in view of the above point.

[0013]

[Means for Solving the Problem] The stator substrate with which the above-mentioned purpose is placed in a fixed position according to this invention, and the coil for a drive is prepared in one [ at least ] field, In the small motor which has disc-like Rota equipped with the magnet which counters this stator substrate, and is supported pivotable, and is magnetized by the multi-electrode The above-mentioned coil for a drive is attained by the small motor characterized by being formed with the pattern of two or more layers formed in the whole surface of the above-mentioned stator substrate by the photolithography method.

[0014] The small motor by this invention is desirable, and connection of the pattern of the above-mentioned two or more layers is mutually carried out as one group.

[0015] The small motor by this invention is desirable, the pattern of the above-mentioned two or more layers is divided into two or more groups, and connection of each group's pattern is carried out mutually.

[0016] The small motor by this invention is desirable, and one group's pattern is used among two or more above-mentioned groups' patterns for location detection and/or speed detection.

[0017] The small motor by this invention is desirable, and the York layer for a magnetic-path configuration is formed on the above-mentioned stator substrate.

[0018] The small motor by this invention is desirable, and the pattern formed on the above-mentioned stator substrate consists of the magnetic substance.

[0019]

[Function] Since the coil for a drive is formed in the whole surface of a stator substrate from the pattern of two or more layers formed by the photolithography method, while it is thin-shape-ized very much by it as compared with a flexible printed coil according to the above-mentioned configuration, close dimensional accuracy and positioning accuracy will be acquired very much about the pattern which constitutes the coil for a drive.

[0020] When connection of the pattern of the above-mentioned two or more layers is mutually carried out as one group and the number of turns of the coil for a drive is the same, it is possible to make width of face of each pattern large, and coil resistance is reduced. Therefore, more drive currents can be passed in the coil for a drive.

[0021] When the pattern of the above-mentioned two or more layers is divided into two or more groups and connection of each group's pattern is carried out mutually, resistance becomes possible [ constituting two or more sets of coils for a drive which can be reduced sharply ].

[0022] Since induced voltage occurs to this group's pattern with rotation of Rota when one group's pattern is used among two or more above-mentioned groups' patterns for location detection and/or speed detection, this induced voltage is detected, it processes suitably, and location detection and/or rotational-speed detection of Rota are performed.

[0023] When the York layer for a magnetic-path configuration is formed on the above-mentioned stator substrate, the magnetic flux of the Rota magnet will pass this York layer, and a flux linkage with the coil for a drive increases. Therefore, the magnetic flux of the Rota magnet will be used further effectively.

[0024] Since the coil for a drive is the magnetic substance and the magnetic flux of the Rota magnet can be brought together in this pattern when the pattern formed on the above-mentioned stator substrate consists of the magnetic substance, generating torque increases.

[0025]

[Example] Hereafter, the suitable example of this invention is explained to a detail, referring to

drawing 1 thru/or drawing 15 . In addition, since the example described below is a suitable example of this invention, desirable various limitation is attached technically, but especially the range of this invention is not restricted to these modes, as long as there is no publication of the purport which limits this invention in the following explanation.

[0026] Drawing 1 and drawing 2 show the first example of the small motor by this invention. That is, in drawing 1 and drawing 2 , the small motor 10 consists of the flat stator 11, bearing 12 with which the lower part of bearing 11a formed near the core of this stator 11 was equipped, a revolving shaft 13 supported by this bearing 11a and bearing 12 pivotable, and Rota 14 fixed to this revolving shaft 13.

[0027] It is constituted as thrust bearing so that the above-mentioned bearing 11a may support a revolving shaft 13 in the direction of a path and bearing 12 may support a revolving shaft to shaft orientations.

[0028] Above-mentioned Rota 14 has annular Rota magnet 14a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 11 may be countered. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 14, but this Rota magnet 14a may be directly formed of the spatter etc. to the inferior surface of tongue of Rota 14. Moreover, Rota 14 may be formed in a revolving shaft 13 and one.

[0029] Here, multi-electrode magnetization of the Rota magnet 14a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0030] On the other hand, the stator 11 is equipped with the stator substrate 16 laid on the base 15. As this stator substrate 16 is shown in drawing 3 , the coil 17 for a drive and the electrode 18 grade are formed in that front face by the photolithography method. Here, in order that this stator 11 may increase the magnetic flux interlinked in the coil 17 for a drive so that the magnetism of Rota magnet 14a may be used effectively, it will act as York for magnetic-path formation by forming the field which the base 15 is formed from the magnetic substance, or counters the whole stator substrate 16 or Rota magnet 14a preferably from the magnetic substance.

[0031] In drawing 3 , the formation process of the coil 17 for a drive to the stator substrate 16 and electrode 18 grade is explained one by one. The first insulating layer 20 is formed in the front face of the stator substrate 16 in point \*\* and a process 1. in this case, formation of an insulating layer 20 — for example, SiO<sub>2</sub> Si<sub>3</sub> N<sub>4</sub> etc. — using it — PVD (Physical Vapor Deposition) — law and CVD (Chemical Vapor Deposition) — it is performed by law etc. and resin coating. Moreover, when the oxide of an ingredient is an insulator like Si substrate in the stator substrate 16, an insulating layer 20 is formed by heating the stator substrate 16 to an elevated temperature in an oxidizing atmosphere.

[0032] Then, in a process 2, the first conductive layer 21 which should serve as a coil for a drive and a connection pattern is formed on an insulating layer 20. In this case, a conductive layer 21 forms conductors, such as copper, aluminum, gold, and nickel, by PVD, plating, etc.

[0033] Next, in a process 3, from on the first conductive layer 21, the photoresist 22 which is a giant-molecule resin ingredient is applied, and at a process 4, the first photo mask 30 shown in drawing 4 is used, and it is exposed. In this case, like illustration, the first photo mask 30 is constituted so that it may have window parts 30a, 30b, and 30c, respectively into the parts of some coils 17 for a drive, a connection pattern, and an electrode 18.

[0034] And in a process 5, the unexposed excessive photoresist 22 is removed by washing etc. and the part of the first conductive layer 21 exposed by removal of a photoresist 22 is removed by etching in a process 6. Then, at a process 7, the solvent which does not act on the first insulating layer 20 of the above and the first conductive layer 21 is used, and the residual photoresist 22 is removed. The first electric conduction pattern 23 which should constitute the part, connection pattern, and electrode 18 of the coil 17 for a drive which has a predetermined pattern in this way is formed.

[0035] Then, in a process 8, the second insulating layer 24 is formed in the whole front face of the stator substrate 16 so that this first electric conduction pattern 23 may be covered.

[0036] And in a process 9, the second photo mask 31 shown in drawing 5 is used, and window

part 24a for energization is formed to this second insulating layer 24. In this case, as shown in drawing 5, the second photo mask 31 is constituted so that it may have window parts 31a and 31b, respectively into the connection terminal area of each coil for a drive of the first electric conduction pattern 23, and the part of an electrode 18.

[0037] Next, in a process 10, the third photo mask 32 shown in drawing 6 is used, and the second electric conduction pattern 25 is formed from on the second insulating layer 24 by the same procedure as the process 2 thru/or process 7 mentioned above. In this case, like illustration, the third photo mask 32 is constituted so that it may have window parts 32a, 32b, and 32c, respectively into the parts of some coils 17 for a drive, a connection pattern, and an electrode 18.

[0038] Then, in a process 11, from on the second electric conduction pattern 25, in order to prevent the pattern short-circuit by adhesion of conductive dust, and oxidation of a conductive layer, the third insulating layer 26 for pattern protection is formed so that the whole front face of the stator substrate 16 may be covered.

[0039] Finally in a process 12, the fourth photo mask 33 shown in drawing 7 is used, and window part 26a for electric supply is formed to the third insulating layer 26. In this case, the fourth photo mask 33 is constituted so that it may have window part 33a into the first and second parts of the electrode 18 of the electric conduction patterns 23 and 25.

[0040] In this way, connection is carried out as six coils show the coil 17 for a drive of each other constituted with the first electric conduction pattern 23 and the second electric conduction pattern 25 to drawing 8, respectively in the plurality by the coil pattern of the first electric conduction pattern 23 which laps up and down, and the second electric conduction pattern 25, and illustration. While the coil for a drive mutually located in the radial opposite side by this is connected to a serial A side besides one coil for a drive will be mutually connected among the coils for a drive of each phase of the three phase connected to the serial, i.e., U phase, V phase, and W phase, and a side besides the coil for a drive of another side will be connected to one of the electrodes 18, respectively, and the coil 17 for a drive of a three phase is constituted.

[0041] The small motor 10 by this example is constituted as mentioned above, and as drawing 1 and drawing 2 show, the field generated in this coil 17 for a drive acts to N poles each and the south pole of Rota magnet 14a by energizing from an electrode 18 to each coil 17 for a drive on the stator substrate 16, respectively. Thereby, Rota 14 carries out a rotation drive around a revolving shaft 13.

[0042] Since the coil 17 for a drive is formed in the whole surface of the stator substrate 16 from the patterns 23 and 25 of two or more layers formed by the photolithography method one by one, while it is thin-shape-ized very much by it as compared with a flexible printed coil according to this example, close dimensional accuracy and positioning accuracy will be acquired very much about the pattern which constitutes the coil 17 for a drive. Therefore, property degradation of the motor produced by the precision fall at the time of manufacture decreases extremely. Moreover, since these patterns 23 and 25 are formed of conductor layers, such as copper, aluminum, gold, and nickel, they will consist of low resistance minutely.

[0043] Since the coil 17 for a drive is formed with the patterns 23 and 25 of two or more layers as compared with what followed, for example, formed the coil for a drive superficially with the electric conduction pattern on the conventional stator substrate when the number of turns of the coil 17 for a drive was the same according to this example, it is possible to make large width of face of each patterns 23 and 25, and coil resistance is reduced. Therefore, since more drive currents can be passed in the coil for a drive, generating torque will increase.

[0044] Moreover, since the number of coil turns can be made [ more ] when coil resistance is made the same, generating torque will increase similarly. Furthermore, it is not necessary to paste up or to solder the coil 17 for a drive like before, for electrical installation. Moreover, mass production also becomes possible by forming the pattern of a lot of coils for a drive at once like the case of manufacture of a semiconductor device on the base of a big stator, and cutting to each stator substrate afterwards. Therefore, working efficiency will be raised and cost will also be reduced.

[0045] By the way, in the above-mentioned example, the coil 17 for a drive consists of the 1 group's A coils which consisted of the first electric conduction pattern 23 and the second electric conduction pattern 25 which were formed by the photolithography method on the stator substrate 16. And as shown in drawing 9, after forming the first group's A coil on the stator substrate 16, the second group's B coil is formed on the first group's A coil by repeating the processes 2-12 of drawing 3. In this case, since it connects mutually and connects with an electrode 18 like the first group A who also shows each coil of the second group B to drawing 8, the first group A and the second group B will be connected as shown in drawing 10 as a whole.

[0046] Here, as each coil of each phase, i.e., U phase, V phase, and W phase is shown in the equal circuit of drawing 11, two coils, the first group each other connected to a serial, respectively and the second group, will be further connected to juxtaposition. Thereby, the coil in each phase becomes half resistance as compared with the case where it is shown in drawing 8. Therefore, according to the coil for a drive equipped with the coil of the first group A and the second group B by which the laminating was carried out, even if it narrows width of face of a pattern and makes [ many ] the number of turns, coil resistance will be pushed low and big torque will be acquired by that of \*\*\*\*\*.

[0047] Moreover, when it has the coil of the first group A and the second group B by which the laminating was carried out as mentioned above, the first group A is connected to an electrode 18 like the case of drawing 8. As it uses as a coil for a drive and the second group B is connected to electrode with an another electrode 18, you may make it detect the induced voltage generated in the second group B with rotation of Rota 14 by using this another electrode as a detection electrode. In this case, rotation location detection and/or rotational-speed detection of Rota 14 are performed by detecting the electrical potential difference generated in the second group B.

[0048] Furthermore, since this second group's B pattern is detailed, rotation location detection and/or rotational-speed detection of Rota 14 are more highly precise, and are performed. And since this second group's B pattern is arranged corresponding to the perimeter of Rota 14, full-time detection is also attained.

[0049] Drawing 12 shows the second example of the small motor by this invention. That is, in drawing 12, the small motor 40 consists of the flat stator 41, bearing 42 with which the lower part of bearing 41a formed near the core of this stator 41 was equipped, a revolving shaft 43 supported by this bearing 41a and bearing 42 pivotable, and Rota 44 fixed to this revolving shaft 43.

[0050] It is constituted as thrust bearing so that the above-mentioned bearing 41a may support a revolving shaft 43 in the direction of a path and bearing 42 may support a revolving shaft to shaft orientations.

[0051] Above-mentioned Rota 44 has annular Rota magnet 44a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 41 may be counteracted. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 44, but this Rota magnet 44a may be directly formed of the spatter etc. to the inferior surface of tongue of Rota 44. Moreover, Rota 44 may be formed in a revolving shaft 43 and one.

[0052] Here, multi-electrode magnetization of the Rota magnet 44a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0053] On the other hand, the stator 41 is equipped with the stator yoke 46 which consists of the magnetic substance prepared on the base 45, and the stator substrate 47 formed on it. As this stator substrate 47 is shown in drawing 3 like the stator substrate 16 mentioned above, the coil 48 for a drive, the electrode (not shown), etc. are formed in that front face by the photolithography method.

[0054] In this case, since the base 45 and the stator substrate 47 of a stator 41 consist of non-magnetic material, they need to use the magnetism of Rota magnet 44a effectively, and need to increase the magnetic flux interlinked in the coil 47 for a drive. For this reason, the stator yoke 46 which consists of the magnetic substance is formed.

[0055] Moreover, you may make it the stator substrate 47 equip the bottom of the first



insulating layer 50 with a magnetic layer 49, as shown in drawing 13 instead of forming the above-mentioned stator yoke 46.

[0056] Here, formation processes, such as a magnetic layer to the stator substrate 47 in drawing 12, the coil 48 for a drive, and an electrode, are explained one by one using drawing 13. In point \*\* and a process 1, the magnetic layer 49 which acts on the front face of the stator substrate 47 as a back yoke is formed. Formation of this magnetic layer 49 is performed by PVD etc. in the magnetic substance, such as nickel and a soft ferrite. Next, the first insulating layer 50 is formed in the front face of the stator substrate 47 in a process 2. in this case, formation of an insulating layer 50 — for example, SiO<sub>2</sub> Si<sub>3</sub> N<sub>4</sub> etc. — it is used and is performed by PVD, a CVD method, etc. and resin coating. Moreover, when the oxide of an ingredient is an insulator like Si substrate in the stator substrate 47, an insulating layer 50 may be formed by heating the stator substrate 47 to an elevated temperature in an oxidizing atmosphere.

[0057] Then, in a process 3, the first conductive layer 51 which should serve as a coil for a drive and a connection pattern is formed from on an insulating layer 50. In this case, a conductive layer 51 is formed of PVD, plating, etc. in conductors, such as copper, aluminum, gold, and nickel.

[0058] Next, in a process 4, from on the first conductive layer 51, the photoresist 52 which is a giant-molecule resin ingredient is applied, and at a process 5, the first photo mask 30 shown in drawing 4 is used, and it is exposed.

[0059] And in a process 6, the unexposed excessive photoresist 52 is removed by washing etc. and the part of the first conductive layer 51 exposed by removal of a photoresist 52 is removed by etching in a process 7. Then, at a process 8, the solvent which does not act on the first insulating layer 50 of the above and the first conductive layer 51 is used, and the residual photoresist 52 is removed. The first electric conduction pattern 53 which should constitute the part, connection pattern, and electrode of the coil 48 for a drive which has a predetermined pattern in this way will be formed.

[0060] Then, in a process 9, the second insulating layer 54 is formed in the whole front face of the stator substrate 47 so that this first electric conduction pattern 53 may be covered.

[0061] And in a process 10, the second photo mask 31 shown in drawing 5 is used, and window part 54a for energization is formed to this second insulating layer 54.

[0062] Next, in a process 11, the third photo mask 32 shown in drawing 6 is used, and the second electric conduction pattern 55 is formed from on the second insulating layer 54 by the same procedure as the process 3 thru/or process 8 mentioned above.

[0063] Then, in a process 12, from on the second electric conduction pattern 55, in order to prevent the pattern short-circuit by adhesion of conductive dust, and oxidation of a conductive layer, the third insulating layer 56 for pattern protection is formed so that the whole front face of the stator substrate 47 may be covered.

[0064] Finally in a process 13, the fourth photo mask 33 shown in drawing 7 is used, and window part 56a for electric supply is formed to the third insulating layer 56.

[0065] In this way, connection is carried out as six coils show the coil 48 for a drive of each other constituted with the first electric conduction pattern 53 and the second electric conduction pattern 55 to drawing 8, respectively in the plurality by the coil pattern of the first electric conduction pattern 53 which laps up and down, and the second electric conduction pattern 55, and illustration. While the coil for a drive mutually located in the radial opposite side by this is connected to a serial A side besides one coil for a drive will be mutually connected among the coils for a drive of each phase of the three phase connected to the serial, i.e., U phase, V phase, and W phase, and a side besides the coil for a drive of another side will be connected to one of the electrodes 18, respectively, and the coil 47 for a drive of a three phase is constituted.

[0066] According to the small motor 40 of such a configuration, the field generated in this coil 47 for a drive acts to N poles each and the south pole of Rota magnet 44a by energizing from an electrode to each coil 47 for a drive on the stator substrate 47, respectively. Thereby, Rota 44 carries out a rotation drive around a revolving shaft 43.

[0067] Furthermore, when the magnetic layer 49 formed on the stator yoke 46 arranged in the

bottom of the stator substrate 47 or the stator substrate 47 acts as a back yoke, the magnetic flux of Rota magnet 44a will be used effectively. In addition, to the case of a magnetic layer 49, since the gap between a back yoke and rotary magnet 44a is more narrow, a flux linkage with the coil of Rota magnet 44a will increase further.

[0068] Like the stator substrate shown in drawing 9 also in this case, after forming the first group's A coil on the stator substrate 47, as shown in drawing 14, the second group's B coil may be formed on the first group's A coil by repeating the processes 3-13 of drawing 13.

[0069] Thereby, when two coils, the first group by whom each coil of each phase, i.e., U phase, V phase, and W phase is mutually connected to a serial, respectively, and the second group, are further connected to juxtaposition, the coil in each phase becomes half resistance as compared with the case of only the first group's A coil. Moreover, only the second group's B coil is connected to an electrode other than the electrode to which driver voltage is impressed, and by using this another electrode as a detection electrode, when detecting the induced voltage generated in the second group B with rotation of Rota 44, rotation location detection and/or rotational-speed detection of Rota 44 are performed, for example.

[0070] Drawing 15 shows the third example of the small motor by this invention. That is, in drawing 15, the small motor 60 consists of the flat stator 61, bearing 62a and 62b which it had near the core of this stator 61, a revolving shaft 63 supported by this bearing 62a and 62b pivotable, and Rota 64 fixed to this revolving shaft 63.

[0071] It is constituted as thrust bearing so that the above-mentioned bearing 62a may support a revolving shaft 63 in the direction of a path and bearing 62b may support a revolving shaft to shaft orientations. The small motor 60 by this example is a different configuration in the small motor 10 which showed only the point of having this bearing 62a to drawing 1 and drawing 2.

[0072] Above-mentioned Rota 64 has annular Rota magnet 64a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 61 may be countered. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 64, but this Rota magnet 64a may be directly formed of the spatter etc. to the inferior surface of tongue of Rota 64. Moreover, Rota 64 may be formed in a revolving shaft 63 and one.

[0073] Here, multi-electrode magnetization of the Rota magnet 64a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0074] On the other hand, the stator 61 is equipped with the stator substrate 66 laid on the base 65. As this stator substrate 66 is shown in drawing 3, the coil 67 for a drive, the electrode (not shown), etc. are formed in that front face by the photolithography method. Here, in order that this stator 61 may increase the magnetic flux interlinked in the coil 67 for a drive so that the magnetism of Rota magnet 64a may be used effectively, it will act as York for magnetic-path formation by forming the field which the base 65 is formed from the magnetic substance, or counters the whole stator substrate 66 or Rota magnet 64a preferably from the magnetic substance.

[0075] According to the small motor 60 of such a configuration, the field generated in this coil 67 for a drive acts to N poles each and the south pole of Rota magnet 64a by energizing from an electrode to each coil 67 for a drive on the stator substrate 66, respectively. Thereby, Rota 64 carries out a rotation drive around a revolving shaft 63.

[0076] Here, since the coil 67 for a drive on the stator substrate 66 is formed by the photolithography method, its dimensional accuracy and positioning accuracy of a coil coil are very high, therefore its property degradation of the motor produced by the precision fall at the time of manufacture decreases extremely. Moreover, since the mutual connection of the coil 67 for a drive and the connection to an electrode are formed in the coil 67 for a drive, and coincidence by the photolithography method and adhesion of a up to [ the stator substrate 66 of the coil 67 for a drive ] and the soldering activity over the electrode of a coil coil terminal are unnecessary, working efficiency will improve and assembly cost will be reduced sharply.

[0077] In this case, since the coil 67 for a drive is constituted by the pattern of the bilayer of the first electric conduction pattern 23 and the second electric conduction pattern 25, as compared with the case of a flexible printed coil, the width of face of a pattern is formed widely

conventionally. Therefore, since coil resistance is reduced, it is possible to pass a big drive current. For this reason, sufficient torque will be acquired.

[0078] In addition, in the above-mentioned example, although the coil for a drive consists of coils of one group or two groups by whom the laminating was done, not only this but the coil for a drive may consist of two or more groups' coils by carrying out the laminating of the third and fourth group's coil further. By this, when each group's coil is mutually connected to juxtaposition, the combined-resistance value of a coil will be reduced further.

[0079] Moreover, rotation location detection and/or rotational-speed detection of Rota 64 may be made to be performed by connecting only the coil of one group in two or more groups' coil to another electrode, and detecting the induced voltage generated in the coil of groups involved.

[0080]

[Effect of the Invention] As stated above, while being formed small [ the coil for a drive ], and with high precision according to this invention, the extremely excellent small motor by which sufficient motor torque was acquired will be offered.

---

[Translation done.]

**\* NOTICES \***

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

**TECHNICAL FIELD**

---

[Industrial Application] This invention relates to the small motor which has a stator substrate, disc-like Rota, and the coil for a drive arranged by this stator substrate.

---

[Translation done.]

\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

PRIOR ART

---

[Description of the Prior Art] Conventionally, such a small motor is constituted as shown in drawing 16 . That is, in drawing 16 , the small motor 1 consists of the flat stator 2, bearing 3a and 3b prepared near the core of this stator 2, a revolving shaft 4 supported by this bearing 3a and 3b pivotable, and Rota 5 fixed to this revolving shaft 4.

[0003] It consists of oil impregnation metal, lubricative resin, etc. so that this bearing 3a may support a revolving shaft 4 in the direction of a path, and bearing 3b is constituted as thrust bearing so that a revolving shaft may be supported to shaft orientations.

[0004] Above-mentioned Rota 5 has annular Rota magnet 5a attached in the inferior surface of tongue while being arranged so that the whole surface (in the case of illustration top face) of a stator 2 may be countered.

[0005] Here, multi-electrode magnetization of the Rota magnet 5a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferencial direction.

[0006] On the other hand, the stator 2 is equipped with stator substrate 2b laid on base 2a. This stator substrate 2b has circuit elements, such as two or more coils 6 for a drive arranged by the equiangular distance along with the circumferencial direction, and a hall device which is not illustrated, resistance, a capacitor, so that each magnetic pole of this Rota magnet 5a may be countered, while being formed by the griddle, the magnetic steel sheet, etc. so that it may act as fixed York for example.

[0007] Thus, according to the constituted small motor 1, the field generated in this coil 6 for a drive acts to N poles each and the south pole of Rota magnet 5a by energizing to each coil 6 for a drive on stator substrate 2b, respectively. Thereby, Rota 5 carries out a rotation drive around a revolving shaft 4.

---

[Translation done.]

\* NOTICES \*

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

EFFECT OF THE INVENTION

---

[Effect of the Invention] As stated above, while being formed small [ the coil for a drive ], and with high precision according to this invention, the extremely excellent small motor by which sufficient motor torque was acquired will be offered.

---

[Translation done.]

\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

TECHNICAL PROBLEM

---

[Problem(s) to be Solved by the Invention] By the way, downsizing and miniaturization are advanced in all the goods fields in recent years, and the request of a miniaturization and thin-shape-izing is becoming still stronger also about the small motor used as a driving source of various devices.

[0009] Therefore, in miniaturizing, in the above small motors 1, thin shape-ization of the coil 6 for a drive is especially needed. for this reason, in order to produce the thin coil for a drive, the coil was really fabricated at the resin base — flexible — a printed coil — it is possible to use a product.

[0010] However, this flexible printed coil needs to form the coil for a drive in both sides of the resin base with an electric conduction pattern, when it thin-shape-izes more, but in forming the coil for a drive in both sides, it is in the middle of manufacture, and it is necessary to reverse the resin base. Therefore, there is a problem that positioning of the coil for a drive to both sides of the resin base becomes difficult.

[0011] On the other hand, when forming the coil for a drive only in the whole surface of the resin base, from the point of the width of face of an electric conduction pattern, the number of turns of the coil for a drive will decrease, and motor torque will fall. Moreover, when the electric conduction pattern was made detailed, the electric resistance of an electric conduction pattern increased, the current which flows the coil for a drive decreased, and there was a problem that motor torque will fall.

[0012] This invention aims at offering the small motor by which sufficient motor torque was acquired while the coil for a drive is formed small and with high precision in view of the above point.

---

[Translation done.]

\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

MEANS

---

[Means for Solving the Problem] The stator substrate with which the above-mentioned purpose is placed in a fixed position according to this invention, and the coil for a drive is prepared in one [ at least ] field, In the small motor which has disc-like Rota equipped with the magnet which counters this stator substrate, and is supported pivotable, and is magnetized by the multi-electrode The above-mentioned coil for a drive is attained by the small motor characterized by being formed with the pattern of two or more layers formed in the whole surface of the above-mentioned stator substrate by the photolithography method.

[0014] The small motor by this invention is desirable, and connection of the pattern of the above-mentioned two or more layers is mutually carried out as one group.

[0015] The small motor by this invention is desirable, the pattern of the above-mentioned two or more layers is divided into two or more groups, and connection of each group's pattern is carried out mutually.

[0016] The small motor by this invention is desirable, and one group's pattern is used among two or more above-mentioned groups' patterns for location detection and/or speed detection.

[0017] The small motor by this invention is desirable, and the York layer for a magnetic-path configuration is formed on the above-mentioned stator substrate.

[0018] The small motor by this invention is desirable, and the pattern formed on the above-mentioned stator substrate consists of the magnetic substance.

---

[Translation done.]



\* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

OPERATION

---

[Function] Since the coil for a drive is formed in the whole surface of a stator substrate from the pattern of two or more layers formed by the photolithography method, while it is thin-shaped very much by it as compared with a flexible printed coil according to the above-mentioned configuration, close dimensional accuracy and positioning accuracy will be acquired very much about the pattern which constitutes the coil for a drive.

[0020] When connection of the pattern of the above-mentioned two or more layers is mutually carried out as one group and the number of turns of the coil for a drive is the same, it is possible to make width of face of each pattern large, and coil resistance is reduced. Therefore, more drive currents can be passed in the coil for a drive.

[0021] When the pattern of the above-mentioned two or more layers is divided into two or more groups and connection of each group's pattern is carried out mutually, resistance becomes possible [ constituting two or more sets of coils for a drive which can be reduced sharply ].

[0022] Since induced voltage occurs to this group's pattern with rotation of Rota when one group's pattern is used among two or more above-mentioned groups' patterns for location detection and/or speed detection, this induced voltage is detected, it processes suitably, and location detection and/or rotational-speed detection of Rota are performed.

[0023] When the York layer for a magnetic-path configuration is formed on the above-mentioned stator substrate, the magnetic flux of the Rota magnet will pass this York layer, and a flux linkage with the coil for a drive increases. Therefore, the magnetic flux of the Rota magnet will be used further effectively.

[0024] Since the coil for a drive is the magnetic substance and the magnetic flux of the Rota magnet can be brought together in this pattern when the pattern formed on the above-mentioned stator substrate consists of the magnetic substance, generating torque increases.

---

[Translation done.]

## \* NOTICES \*

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

---

**EXAMPLE**


---

[Example] Hereafter, the suitable example of this invention is explained to a detail, referring to drawing 1 thru/or drawing 15 . In addition, since the example described below is a suitable example of this invention, desirable various limitation is attached technically, but especially the range of this invention is not restricted to these modes, as long as there is no publication of the purport which limits this invention in the following explanation.

[0026] Drawing 1 and drawing 2 show the first example of the small motor by this invention. That is, in drawing 1 and drawing 2 , the small motor 10 consists of the flat stator 11, bearing 12 with which the lower part of bearing 11a formed near the core of this stator 11 was equipped, a revolving shaft 13 supported by this bearing 11a and bearing 12 pivotable, and Rota 14 fixed to this revolving shaft 13.

[0027] It is constituted as thrust bearing so that the above-mentioned bearing 11a may support a revolving shaft 13 in the direction of a path and bearing 12 may support a revolving shaft to shaft orientations.

[0028] Above-mentioned Rota 14 has annular Rota magnet 14a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 11 may be counteracted. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 14, but this Rota magnet 14a may be directly formed of the spatter etc. to the inferior surface of tongue of Rota 14. Moreover, Rota 14 may be formed in a revolving shaft 13 and one.

[0029] Here, multi-electrode magnetization of the Rota magnet 14a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0030] On the other hand, the stator 11 is equipped with the stator substrate 16 laid on the base 15. As this stator substrate 16 is shown in drawing 3 , the coil 17 for a drive and the electrode 18 grade are formed in that front face by the photolithography method. Here, in order that this stator 11 may increase the magnetic flux interlinked in the coil 17 for a drive so that the magnetism of Rota magnet 14a may be used effectively, it will act as York for magnetic-path formation by forming the field which the base 15 is formed from the magnetic substance, or counters the whole stator substrate 16 or Rota magnet 14a preferably from the magnetic substance.

[0031] In drawing 3 , the formation process of the coil 17 for a drive to the stator substrate 16 and electrode 18 grade is explained one by one. The first insulating layer 20 is formed in the front face of the stator substrate 16 in point \*\* and a process 1. in this case, formation of an insulating layer 20 — for example, SiO<sub>2</sub> Si<sub>3</sub> N<sub>4</sub> etc. — using it — PVD (Physical Vapor Deposition) — law and CVD (Chemical Vapor Deposition) — it is performed by law etc. and resin coating. Moreover, when the oxide of an ingredient is an insulator like Si substrate in the stator substrate 16, an insulating layer 20 is formed by heating the stator substrate 16 to an elevated temperature in an oxidizing atmosphere.

[0032] Then, in a process 2, the first conductive layer 21 which should serve as a coil for a drive and a connection pattern is formed on an insulating layer 20. In this case, a conductive layer 21 forms conductors, such as copper, aluminum, gold, and nickel, by PVD, plating, etc.

[0033] Next, in a process 3, from on the first conductive layer 21, the photoresist 22 which is a

giant-molecule resin ingredient is applied, and at a process 4, the first photo mask 30 shown in drawing 4 is used, and it is exposed. In this case, like illustration, the first photo mask 30 is constituted so that it may have window parts 30a, 30b, and 30c, respectively into the parts of some coils 17 for a drive, a connection pattern, and an electrode 18.

[0034] And in a process 5, the unexposed excessive photoresist 22 is removed by washing etc. and the part of the first conductive layer 21 exposed by removal of a photoresist 22 is removed by etching in a process 6. Then, at a process 7, the solvent which does not act on the first insulating layer 20 of the above and the first conductive layer 21 is used, and the residual photoresist 22 is removed. The first electric conduction pattern 23 which should constitute the part, connection pattern, and electrode 18 of the coil 17 for a drive which has a predetermined pattern in this way is formed.

[0035] Then, in a process 8, the second insulating layer 24 is formed in the whole front face of the stator substrate 16 so that this first electric conduction pattern 23 may be covered.

[0036] And in a process 9, the second photo mask 31 shown in drawing 5 is used, and window part 24a for energization is formed to this second insulating layer 24. In this case, as shown in drawing 5, the second photo mask 31 is constituted so that it may have window parts 31a and 31b, respectively into the connection terminal area of each coil for a drive of the first electric conduction pattern 23, and the part of an electrode 18.

[0037] Next, in a process 10, the third photo mask 32 shown in drawing 6 is used, and the second electric conduction pattern 25 is formed from on the second insulating layer 24 by the same procedure as the process 2 thru/or process 7 mentioned above. In this case, like illustration, the third photo mask 32 is constituted so that it may have window parts 32a, 32b, and 32c, respectively into the parts of some coils 17 for a drive, a connection pattern, and an electrode 18.

[0038] Then, in a process 11, from on the second electric conduction pattern 25, in order to prevent the pattern short-circuit by adhesion of conductive dust, and oxidation of a conductive layer, the third insulating layer 26 for pattern protection is formed so that the whole front face of the stator substrate 16 may be covered.

[0039] Finally in a process 12, the fourth photo mask 33 shown in drawing 7 is used, and window part 26a for electric supply is formed to the third insulating layer 26. In this case, the fourth photo mask 33 is constituted so that it may have window part 33a into the first and second parts of the electrode 18 of the electric conduction patterns 23 and 25.

[0040] In this way, connection is carried out as six coils show the coil 17 for a drive of each other constituted with the first electric conduction pattern 23 and the second electric conduction pattern 25 to drawing 8, respectively in the plurality by the coil pattern of the first electric conduction pattern 23 which laps up and down, and the second electric conduction pattern 25, and illustration. While the coil for a drive mutually located in the radial opposite side by this is connected to a serial A side besides one coil for a drive will be mutually connected among the coils for a drive of each phase of the three phase connected to the serial, i.e., U phase, V phase, and W phase, and a side besides the coil for a drive of another side will be connected to one of the electrodes 18, respectively, and the coil 17 for a drive of a three phase is constituted.

[0041] The small motor 10 by this example is constituted as mentioned above, and as drawing 1 and drawing 2 show, the field generated in this coil 17 for a drive acts to N poles each and the south pole of Rota magnet 14a by energizing from an electrode 18 to each coil 17 for a drive on the stator substrate 16, respectively. Thereby, Rota 14 carries out a rotation drive around a revolving shaft 13.

[0042] Since the coil 17 for a drive is formed in the whole surface of the stator substrate 16 from the patterns 23 and 25 of two or more layers formed by the photolithography method one by one, while it is thin-shape-ized very much by it as compared with a flexible printed coil according to this example, close dimensional accuracy and positioning accuracy will be acquired very much about the pattern which constitutes the coil 17 for a drive. Therefore, property degradation of the motor produced by the precision fall at the time of manufacture decreases extremely. Moreover, since these patterns 23 and 25 are formed of conductor layers, such as

copper, aluminum, gold, and nickel, they will consist of low resistance minutely.

[0043] Since the coil 17 for a drive is formed with the patterns 23 and 25 of two or more layers as compared with what followed, for example, formed the coil for a drive superficially with the electric conduction pattern on the conventional stator substrate when the number of turns of the coil 17 for a drive was the same according to this example, it is possible to make large width of face of each patterns 23 and 25, and coil resistance is reduced. Therefore, since more drive currents can be passed in the coil for a drive, generating torque will increase.

[0044] Moreover, since the number of coil turns can be made [ more ] when coil resistance is made the same, generating torque will increase similarly. Furthermore, it is not necessary to paste up or to solder the coil 17 for a drive like before, for electrical installation. Moreover, mass production also becomes possible by forming the pattern of a lot of coils for a drive at once like the case of manufacture of a semiconductor device on the base of a big stator, and cutting to each stator substrate afterwards. Therefore, working efficiency will be raised and cost will also be reduced.

[0045] By the way, in the above-mentioned example, the coil 17 for a drive consists of the 1 group's A coils which consisted of the first electric conduction pattern 23 and the second electric conduction pattern 25 which were formed by the photolithography method on the stator substrate 16. And as shown in drawing 9, after forming the first group's A coil on the stator substrate 16, the second group's B coil is formed on the first group's A coil by repeating the processes 2-12 of drawing 3. In this case, since it connects mutually and connects with an electrode 18 like the first group A who also shows each coil of the second group B to drawing 8, the first group A and the second group B will be connected as shown in drawing 10 as a whole.

[0046] Here, as each coil of each phase, i.e., U phase, V phase, and W phase is shown in the equal circuit of drawing 11, two coils, the first group each other connected to a serial, respectively and the second group, will be further connected to juxtaposition. Thereby, the coil in each phase becomes half resistance as compared with the case where it is shown in drawing 8. Therefore, according to the coil for a drive equipped with the coil of the first group A and the second group B by which the laminating was carried out, even if it narrows width of face of a pattern and makes [ many ] the number of turns, coil resistance will be pushed low and big torque will be acquired by that of \*\*\*\*\*.

[0047] Moreover, when it has the coil of the first group A and the second group B by which the laminating was carried out as mentioned above, the first group A is connected to an electrode 18 like the case of drawing 8. As it uses as a coil for a drive and the second group B is connected to electrode with an another electrode 18, you may make it detect the induced voltage generated in the second group B with rotation of Rota 14 by using this another electrode as a detection electrode. In this case, rotation location detection and/or rotational-speed detection of Rota 14 are performed by detecting the electrical potential difference generated in the second group B.

[0048] Furthermore, since this second group's B pattern is detailed, rotation location detection and/or rotational-speed detection of Rota 14 are more highly precise, and are performed. And since this second group's B pattern is arranged corresponding to the perimeter of Rota 14, full-time detection is also attained.

[0049] Drawing 12 shows the second example of the small motor by this invention. That is, in drawing 12, the small motor 40 consists of the flat stator 41, bearing 42 with which the lower part of bearing 41a formed near the core of this stator 41 was equipped, a revolving shaft 43 supported by this bearing 41a and bearing 42 pivotable, and Rota 44 fixed to this revolving shaft 43.

[0050] It is constituted as thrust bearing so that the above-mentioned bearing 41a may support a revolving shaft 43 in the direction of a path and bearing 42 may support a revolving shaft to shaft orientations.

[0051] Above-mentioned Rota 44 has annular Rota magnet 44a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 41 may be countered. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 44, but this Rota magnet 44a may be directly

formed of the spatter etc. to the inferior surface of tongue of Rota 44. Moreover, Rota 44 may be formed in a revolving shaft 43 and one.

[0052] Here, multi-electrode magnetization of the Rota magnet 44a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0053] On the other hand, the stator 41 is equipped with the stator yoke 46 which consists of the magnetic substance prepared on the base 45, and the stator substrate 47 formed on it. As this stator substrate 47 is shown in drawing 3 like the stator substrate 16 mentioned above, the coil 48 for a drive, the electrode (not shown), etc. are formed in that front face by the photolithography method.

[0054] In this case, since the base 45 and the stator substrate 47 of a stator 41 consist of non-magnetic material, they need to use the magnetism of Rota magnet 44a effectively, and need to increase the magnetic flux interlinked in the coil 47 for a drive. For this reason, the stator yoke 46 which consists of the magnetic substance is formed.

[0055] Moreover, you may make it the stator substrate 47 equip the bottom of the first insulating layer 50 with a magnetic layer 49, as shown in drawing 13 instead of forming the above-mentioned stator yoke 46.

[0056] Here, formation processes, such as a magnetic layer to the stator substrate 47 in drawing 12, the coil 48 for a drive, and an electrode, are explained one by one using drawing 13. In point \*\* and a process 1, the magnetic layer 49 which acts on the front face of the stator substrate 47 as a back yoke is formed. Formation of this magnetic layer 49 is performed by PVD etc. in the magnetic substance, such as nickel and a soft ferrite. Next, the first insulating layer 50 is formed in the front face of the stator substrate 47 in a process 2. in this case, formation of an insulating layer 50 — for example, SiO<sub>2</sub> Si<sub>3</sub> N<sub>4</sub> etc. — it is used and is performed by PVD, a CVD method, etc. and resin coating. Moreover, when the oxide of an ingredient is an insulator like Si substrate in the stator substrate 47, an insulating layer 50 may be formed by heating the stator substrate 47 to an elevated temperature in an oxidizing atmosphere.

[0057] Then, in a process 3, the first conductive layer 51 which should serve as a coil for a drive and a connection pattern is formed from on an insulating layer 50. In this case, a conductive layer 51 is formed of PVD, plating, etc. in conductors, such as copper, aluminum, gold, and nickel.

[0058] Next, in a process 4, from on the first conductive layer 51, the photoresist 52 which is a giant-molecule resin ingredient is applied, and at a process 5, the first photo mask 30 shown in drawing 4 is used, and it is exposed.

[0059] And in a process 6, the unexposed excessive photoresist 52 is removed by washing etc. and the part of the first conductive layer 51 exposed by removal of a photoresist 52 is removed by etching in a process 7. Then, at a process 8, the solvent which does not act on the first insulating layer 50 of the above and the first conductive layer 51 is used, and the residual photoresist 52 is removed. The first electric conduction pattern 53 which should constitute the part, connection pattern, and electrode of the coil 48 for a drive which has a predetermined pattern in this way will be formed.

[0060] Then, in a process 9, the second insulating layer 54 is formed in the whole front face of the stator substrate 47 so that this first electric conduction pattern 53 may be covered.

[0061] And in a process 10, the second photo mask 31 shown in drawing 5 is used, and window part 54a for energization is formed to this second insulating layer 54.

[0062] Next, in a process 11, the third photo mask 32 shown in drawing 6 is used, and the second electric conduction pattern 55 is formed from on the second insulating layer 54 by the same procedure as the process 3 thru/or process 8 mentioned above.

[0063] Then, in a process 12, from on the second electric conduction pattern 55, in order to prevent the pattern short-circuit by adhesion of conductive dust, and oxidation of a conductive layer, the third insulating layer 56 for pattern protection is formed so that the whole front face of the stator substrate 47 may be covered.

[0064] Finally in a process 13, the fourth photo mask 33 shown in drawing 7 is used, and window part 56a for electric supply is formed to the third insulating layer 56.

[0065] In this way, connection is carried out as six coils show the coil 48 for a drive of each

other constituted with the first electric conduction pattern 53 and the second electric conduction pattern 55 to drawing 8, respectively in the plurality by the coil pattern of the first electric conduction pattern 53 which laps up and down, and the second electric conduction pattern 55, and illustration. While the coil for a drive mutually located in the radial opposite side by this is connected to a serial A side besides one coil for a drive will be mutually connected among the coils for a drive of each phase of the three phase connected to the serial, i.e., U phase, V phase, and W phase, and a side besides the coil for a drive of another side will be connected to one of the electrodes 18, respectively, and the coil 47 for a drive of a three phase is constituted.

[0066] According to the small motor 40 of such a configuration, the field generated in this coil 47 for a drive acts to N poles each and the south pole of Rota magnet 44a by energizing from an electrode to each coil 47 for a drive on the stator substrate 47, respectively. Thereby, Rota 44 carries out a rotation drive around a revolving shaft 43.

[0067] Furthermore, when the magnetic layer 49 formed on the stator yoke 46 arranged in the bottom of the stator substrate 47 or the stator substrate 47 acts as a back yoke, the magnetic flux of Rota magnet 44a will be used effectively. In addition, to the case of a magnetic layer 49, since the gap between a back yoke and rotary magnet 44a is more narrow, a flux linkage with the coil of Rota magnet 44a will increase further.

[0068] Like the stator substrate shown in drawing 9 also in this case, after forming the first group's A coil on the stator substrate 47, as shown in drawing 14, the second group's B coil may be formed on the first group's A coil by repeating the processes 3-13 of drawing 13.

[0069] Thereby, when two coils, the first group by whom each coil of each phase, i.e., U phase, V phase, and W phase is mutually connected to a serial, respectively, and the second group, are further connected to juxtaposition, the coil in each phase becomes half resistance as compared with the case of only the first group's A coil. Moreover, only the second group's B coil is connected to an electrode other than the electrode to which driver voltage is impressed, and by using this another electrode as a detection electrode, when detecting the induced voltage generated in the second group B with rotation of Rota 44, rotation location detection and/or rotational-speed detection of Rota 44 are performed, for example.

[0070] Drawing 15 shows the third example of the small motor by this invention. That is, in drawing 15, the small motor 60 consists of the flat stator 61, bearing 62a and 62b which it had near the core of this stator 61, a revolving shaft 63 supported by this bearing 62a and 62b pivotable, and Rota 64 fixed to this revolving shaft 63.

[0071] It is constituted as thrust bearing so that the above-mentioned bearing 62a may support a revolving shaft 63 in the direction of a path and bearing 62b may support a revolving shaft to shaft orientations. The small motor 60 by this example is a different configuration in the small motor 10 which showed only the point of having this bearing 62a to drawing 1 and drawing 2.

[0072] Above-mentioned Rota 64 has annular Rota magnet 64a with which the inferior surface of tongue was equipped while being arranged so that the whole surface (in the case of illustration top face) of a stator 61 may be counteracted. In illustration, it is constituted by another object and fixed to the inferior surface of tongue of Rota 64, but this Rota magnet 64a may be directly formed of the spatter etc. to the inferior surface of tongue of Rota 64. Moreover, Rota 64 may be formed in a revolving shaft 63 and one.

[0073] Here, multi-electrode magnetization of the Rota magnet 64a is carried out so that N pole and the south pole may be located in a line by turns along with a circumferential direction.

[0074] On the other hand, the stator 61 is equipped with the stator substrate 66 laid on the base 65. As this stator substrate 66 is shown in drawing 3, the coil 67 for a drive, the electrode (not shown), etc. are formed in that front face by the photolithography method. Here, in order that this stator 61 may increase the magnetic flux interlinked in the coil 67 for a drive so that the magnetism of Rota magnet 64a may be used effectively, it will act as York for magnetic-path formation by forming the field which the base 65 is formed from the magnetic substance, or counters the whole stator substrate 66 or Rota magnet 64a preferably from the magnetic substance.

[0075] According to the small motor 60 of such a configuration, the field generated in this coil 67

for a drive acts to N poles each and the south pole of Rota magnet 64a by energizing from an electrode to each coil 67 for a drive on the stator substrate 66, respectively. Thereby, Rota 64 carries out a rotation drive around a revolving shaft 63.

[0076] Here, since the coil 67 for a drive on the stator substrate 66 is formed by the photolithography method, its dimensional accuracy and positioning accuracy of a coil coil are very high, therefore its property degradation of the motor produced by the precision fall at the time of manufacture decreases extremely. Moreover, since the mutual connection of the coil 67 for a drive and the connection to an electrode are formed in the coil 67 for a drive, and coincidence by the photolithography method and adhesion of a up to [ the stator substrate 66 of the coil 67 for a drive ] and the soldering activity over the electrode of a coil coil terminal are unnecessary, working efficiency will improve and assembly cost will be reduced sharply.

[0077] In this case, since the coil 67 for a drive is constituted by the pattern of the bilayer of the first electric conduction pattern 23 and the second electric conduction pattern 25, as compared with the case of a flexible printed coil, the width of face of a pattern is formed widely conventionally. Therefore, since coil resistance is reduced, it is possible to pass a big drive current. For this reason, sufficient torque will be acquired.

[0078] In addition, in the above-mentioned example, although the coil for a drive consists of coils of one group or two groups by whom the laminating was done, not only this but the coil for a drive may consist of two or more groups' coils by carrying out the laminating of the third and fourth group's coil further. By this, when each group's coil is mutually connected to juxtaposition, the combined-resistance value of a coil will be reduced further.

[0079] Moreover, rotation location detection and/or rotational-speed detection of Rota 64 may be made to be performed by connecting only the coil of one group in two or more groups' coil to another electrode, and detecting the induced voltage generated in the coil of groups involved.

---

[Translation done.]

## \* NOTICES \*

JPO and NCIPJ are not responsible for any damages caused by the use of this translation.

- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

## DESCRIPTION OF DRAWINGS

## [Brief Description of the Drawings]

[Drawing 1] the first example of the small motor by this invention is shown — it is a fracture top view a part.

[Drawing 2] It is the outline sectional view of the small motor of drawing 1 .

[Drawing 3] It is process drawing showing an example of the production process of the stator substrate in the small motor of drawing 1 one by one.

[Drawing 4] It is the top view showing the mask used with the first conductive layer formation process of drawing 3 .

[Drawing 5] It is the top view showing the mask used with the energization hole formation process of drawing 3 .

[Drawing 6] It is the top view showing the mask used with the second conductive layer formation process of drawing 3 .

[Drawing 7] It is the top view showing the mask used with the electrode formation process for electric supply of drawing 3 .

[Drawing 8] It is the circuit diagram showing an example of the connection of the coil for a drive in the small motor of drawing 1 .

[Drawing 9] It is the sectional view showing other examples of a configuration of the stator substrate in the small motor of drawing 1 .

[Drawing 10] It is the circuit diagram showing an example of the connection of the coil for a drive in the stator substrate of drawing 9 .

[Drawing 11] It is the representative circuit schematic of the coil by the connection of drawing 10 .

[Drawing 12] It is the outline sectional view showing the second example of the small motor by this invention.

[Drawing 13] It is process drawing showing other examples of the production process of the stator substrate in the small motor of drawing 1 one by one.

[Drawing 14] It is the sectional view showing the example of further others of the production process of the stator substrate in the small motor of drawing 1 .

[Drawing 15] It is the outline sectional view showing the third example of the small motor by this invention.

[Drawing 16] It is the outline sectional view showing an example of the conventional small motor.

## [Brief Description of Notations]

10 Small Motor

11 Stator

11a Bearing

12 Bearing

13 Revolving Shaft

14 Rota

14a Rota magnet

15 Base



16 Stator Substrate  
17 Coil for Drive  
18 Electrode  
20 Insulating Layer  
21 First Conductive Layer  
22 Photoresist  
23 First Electric Conduction Pattern  
24 Second Insulating Layer  
25 Second Electric Conduction Pattern  
26 Third Insulating Layer  
30, 31, 32, 33 Photo mask  
40 Small Motor  
41 Stator  
41a Bearing  
42 Bearing  
43 Revolving Shaft  
44 Rota  
44a Rota magnet  
45 Base  
46 Stator Yoke  
47 Stator Substrate  
48 Coil for Drive  
49 Magnetic Layer  
50 Insulating Layer  
51 First Conductive Layer  
52 Photoresist  
53 First Electric Conduction Pattern  
54 Second Insulating Layer  
55 Second Electric Conduction Pattern  
56 Third Insulating Layer  
60 Small Motor  
61 Stator  
62a, 62b Bearing  
63 Revolving Shaft  
64 Rota  
64a Rota magnet  
65 Base  
66 Stator Substrate  
67 Coil for Drive

---

[Translation done.]


## \* NOTICES \*

JPO and NCIP are not responsible for any damages caused by the use of this translation.


- 1.This document has been translated by computer. So the translation may not reflect the original precisely.
- 2.\*\*\* shows the word which can not be translated.
- 3.In the drawings, any words are not translated.

## DRAWINGS


[Drawing 1]

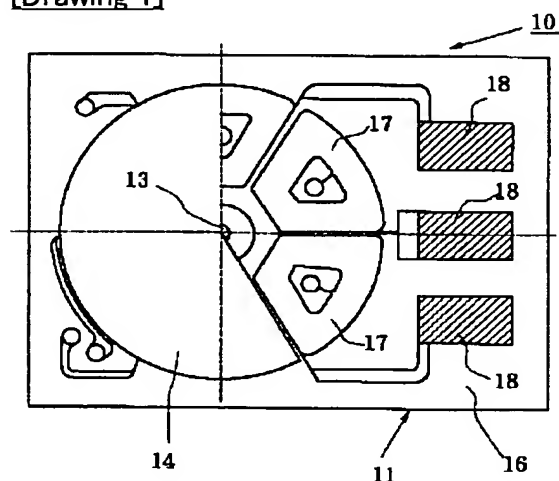


[Drawing 2]

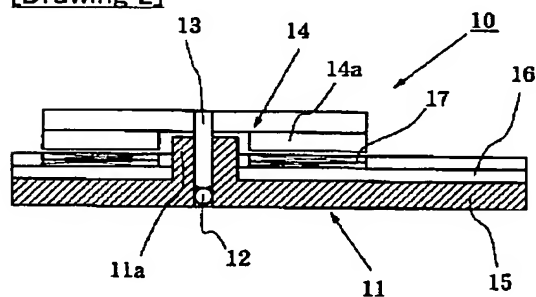


[Drawing 8]

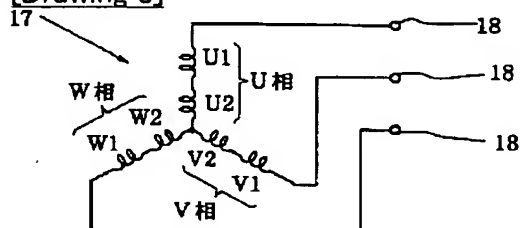


[Drawing 9]




[Drawing 14]




[Drawing 3]

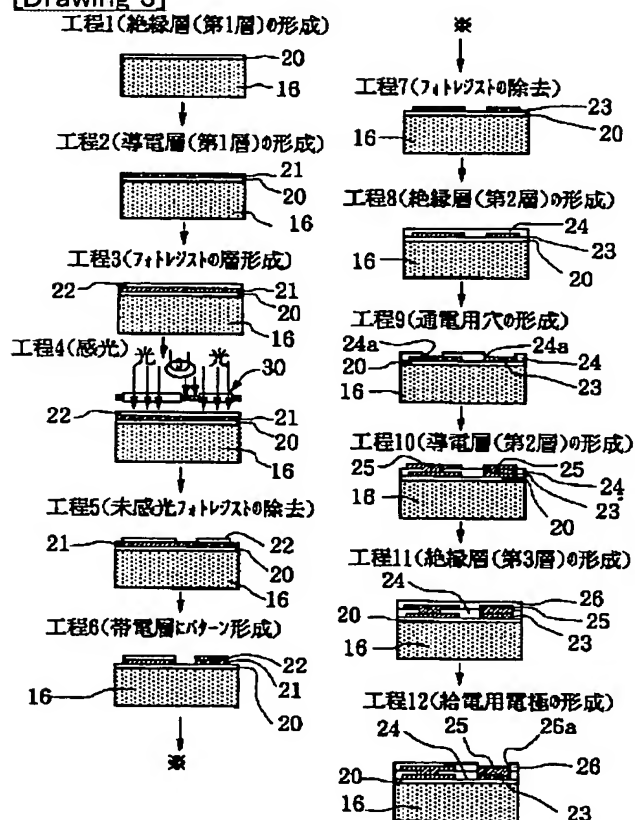


[Drawing 4]

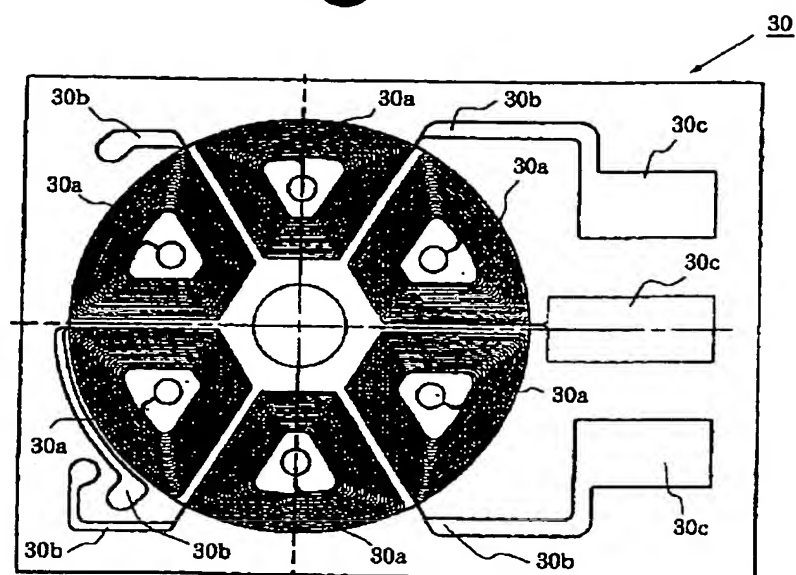


[Drawing 10]

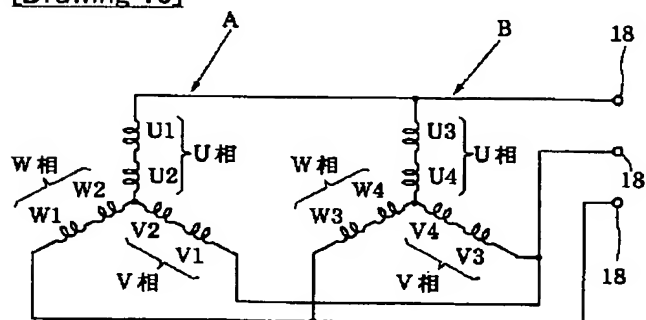


[Drawing 11]

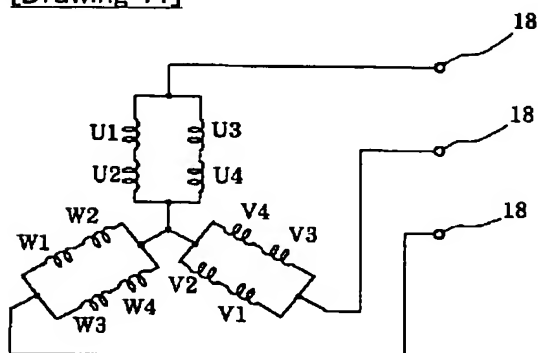


[Drawing 15]

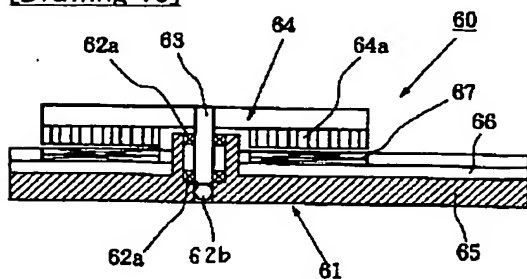


[Drawing 16]

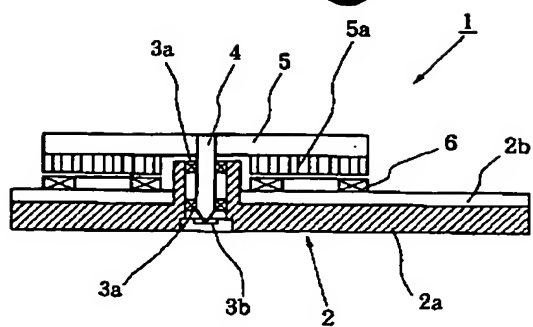


[Drawing 5]

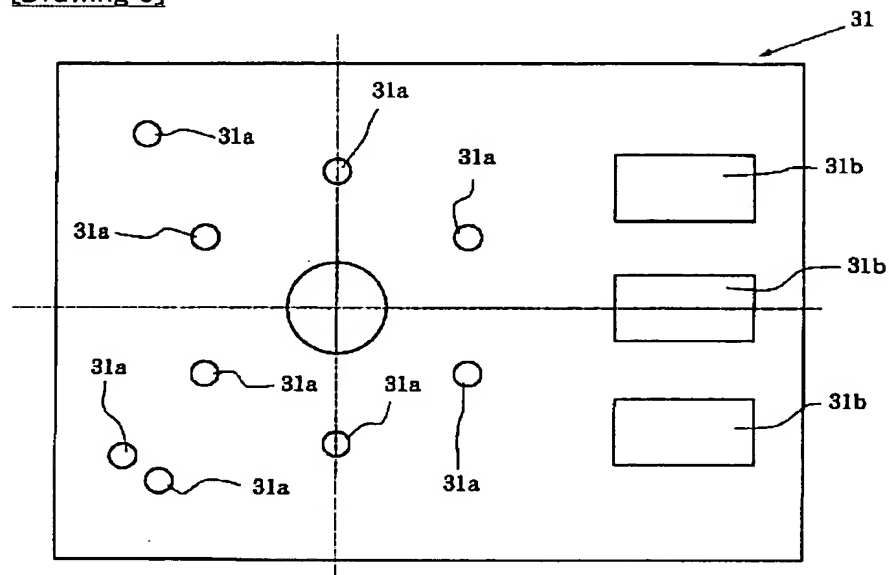


[Drawing 6]

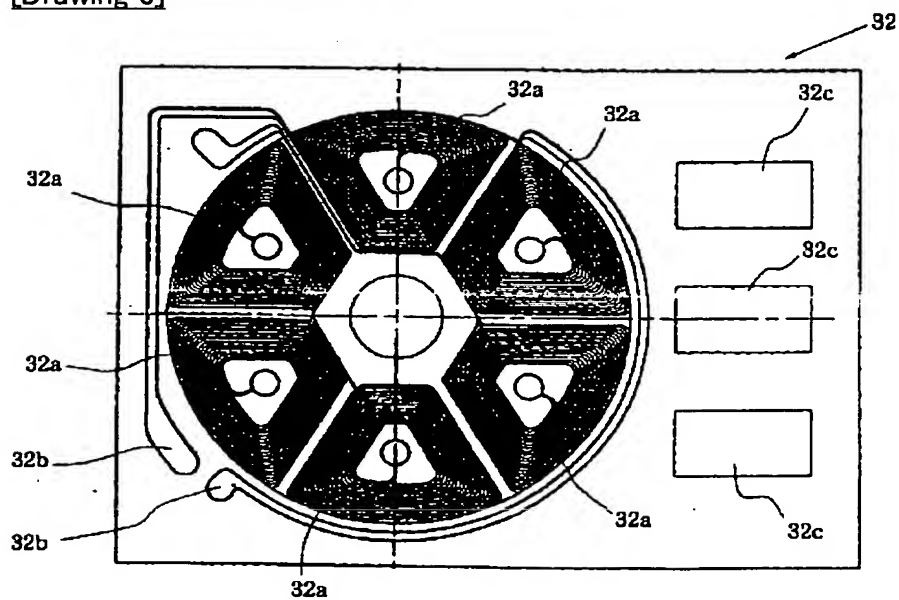


[Drawing 7]

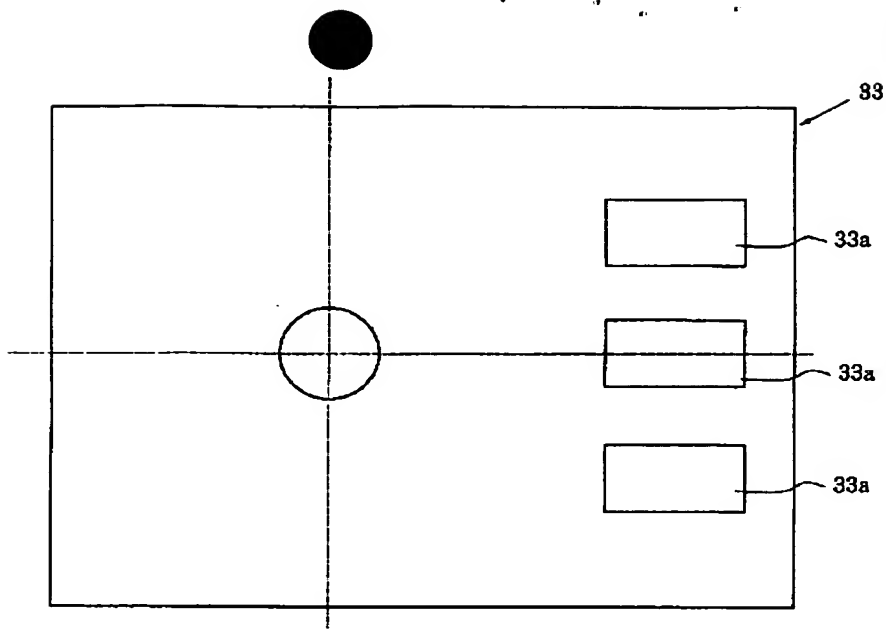

[Drawing 12]

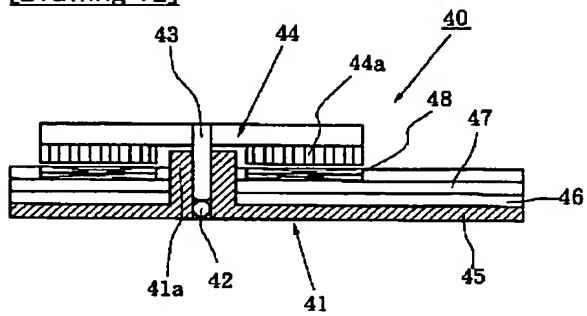

[Drawing 13]

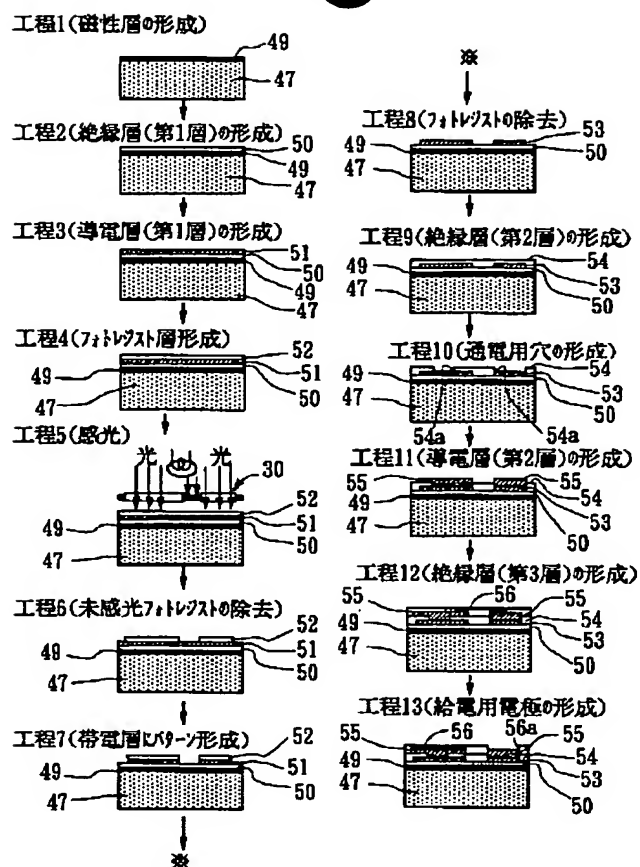

[Translation done.]

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平8-154352

(43) 公開日 平成8年(1996)6月11日

(51) Int.Cl.<sup>6</sup>

H 0 2 K 3/26  
21/24

識別記号

D  
M

庁内整理番号

F I

技術表示箇所

審査請求 未請求 請求項の数 6 F D (全 11 頁)

(21) 出願番号 特願平6-315919

(22) 出願日 平成6年(1994)11月25日

(71) 出願人 000002185

ソニー株式会社

東京都品川区北品川6丁目7番35号

(72) 発明者 草木 賢司

東京都品川区北品川6丁目7番35号 ソニー株式会社内


(74) 代理人 弁理士 岡▲崎▼ 信太郎 (外1名)

(54) 【発明の名称】 小型モータ

(57) 【要約】

【目的】 本発明は、駆動用コイルが小型且つ高精度に形成されると共に、十分なモータトルクが得られるようにした、小型モータを提供すること。

【構成】 固定配置され、かつ少なくとも一方の面に駆動用コイル17が設けられているステータ基板16と、このステータ基板に対向して回転可能に支持され、かつ多極に着磁されているマグネットを備えた円板状のロータ14と、を有する、小型モータ10において、上記駆動用コイルが、上記ステータ基板の一面にフォトリソグラフィ法により形成された複数層のパターン23、25により形成されるように小型モータ10を構成する。

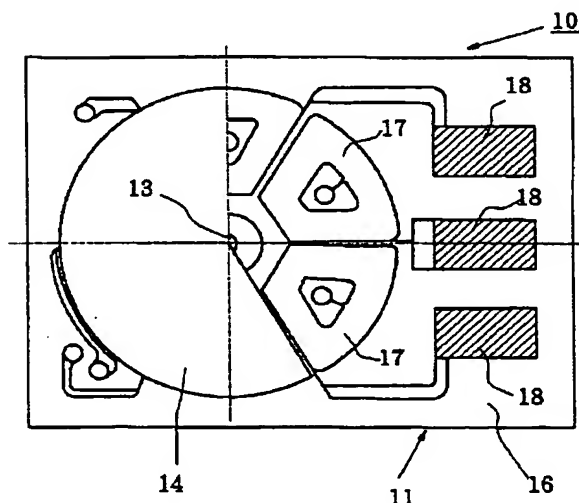



1

## 【特許請求の範囲】

【請求項1】 固定配置され、かつ少なくとも一方の面に駆動用コイルが設けられているステータ基板と、このステータ基板に対向して回転可能に支持され、かつ多極に着磁されているマグネットを備えた円板状のロータと、を有する、小型モータにおいて、

上記駆動用コイルが、上記ステータ基板の一面にフォトリソグラフィ法により形成された複数層のパターンにより形成されていることを特徴とする、小型モータ。

【請求項2】 上記複数層のパターンが、一つのグループとして互いに結線されていることを特徴とする、請求項1に記載の小型モータ。

【請求項3】 上記複数層のパターンが、複数のグループに分割され、各グループのパターンが、互いに結線されていることを特徴とする、請求項1に記載の小型モータ。

【請求項4】 上記複数のグループのパターンのうち、一つのグループのパターンが、位置検出及び／または速度検出のために利用されることを特徴とする、請求項3に記載の小型モータ。

【請求項5】 上記ステータ基板上に、磁路構成用のヨーク層が形成されていることを特徴とする、請求項1から4の何れかに記載の小型モータ。

【請求項6】 上記ステータ基板上に形成されたパターンが、磁性体から構成されていることを特徴とする、請求項1から5の何れかに記載の小型モータ。

## 【発明の詳細な説明】

## 【0001】

【産業上の利用分野】 本発明は、ステータ基板と、円板状のロータと、このステータ基板に配設された駆動用コイルと、を有する、小型モータに関するものである。

## 【0002】

【従来の技術】 従来、このような小型モータは、例えば図16に示すように、構成されている。すなわち、図16において、小型モータ1は、平坦なステータ2と、このステータ2の中心付近に設けられた軸受3a、3bと、この軸受3a、3bにより回転可能に支持された回転軸4と、この回転軸4に固定されたロータ5とから構成されている。

【0003】 この軸受3aは、回転軸4を径方向に支持するように、含油メタルや潤滑性樹脂等から構成されており、また軸受3bは、回転軸を軸方向に支持するように、スラスト軸受として構成されている。

【0004】 上記ロータ5は、ステータ2の一面（図示の場合、上面）に対向するように配設されていると共に、その下面に取り付けられた環状のロータマグネット5aを有している。

【0005】 ここで、ロータマグネット5aは、円周方向に沿ってN極、S極が交互に並ぶように、多極着磁されている。

2

【0006】 これに対して、ステータ2は、ベース2a上に載置されたステータ基板2bを備えている。このステータ基板2bは、固定ヨークとして作用するように、例えば鉄板、電磁鋼板等により形成されていると共に、このロータマグネット5aの各磁極に対向するように、円周方向に沿って等角度間隔に配設された複数個の駆動用コイル6と、図示しないホール素子、抵抗、コンデンサ等の回路素子を有している。

【0007】 このように構成された小型モータ1によれば、ステータ基板2b上の各駆動用コイル6に対してそれぞれ通電することにより、この駆動用コイル6に発生する磁界が、ロータマグネット5aの各N極及びS極に対して作用する。これにより、ロータ5が、回転軸4の周りで回転駆動する。

## 【0008】

【発明が解決しようとする課題】 ところで、近年あらゆる商品分野において、ダウンサイジング、コンパクト化が進められており、各種機器の駆動源として使用される小型モータについても、益々小型化、薄型化の要請が強くなっている。

【0009】 従って、上述のような小型モータ1においては、小型化するにあたって、特に駆動用コイル6の薄型化が必要になる。このため、薄型の駆動用コイルを作製するために、例えば樹脂ベースにコイルを一体成形したフレキシブルプリントコイルなる製品を使用することが考えられる。

【0010】 しかしながら、このフレキシブルプリントコイルは、より薄型化した場合には、樹脂ベースの両面に導電パターンにより駆動用コイルを形成する必要があるが、両面に駆動用コイルを形成する場合には、製造途中で、樹脂ベースを反転させることが必要となる。したがって、樹脂ベースの両面への駆動用コイルの位置決めが困難になるという問題がある。

【0011】 これに対して、樹脂ベースの一面のみに駆動用コイルを形成する場合には、導電パターンの幅の点から、駆動用コイルのターン数が少なくなると、モータトルクが低下してしまう。また、導電パターンを微細化すると、導電パターンの電気抵抗が増大してしまい、駆動用コイルを流れる電流が少なくなると、モータトルクが低下してしまうという問題があった。

【0012】 本発明は、以上の点に鑑み、駆動用コイルが小型且つ高精度に形成されると共に、十分なモータトルクが得られるようにした、小型モータを提供することを目的としている。

## 【0013】

【課題を解決するための手段】 上記目的は、本発明によれば、固定配置され、かつ少なくとも一方の面に駆動用コイルが設けられているステータ基板と、このステータ基板に対向して回転可能に支持され、かつ多極に着磁されているマグネットを備えた円板状のロータと、を有す

る、小型モータにおいて、上記駆動用コイルが、上記ステータ基板の一面にフォトリソグラフィ法により形成された複数層のパターンにより形成されていることを特徴とする、小型モータにより、達成される。

【0014】本発明による小型モータは、好ましくは、上記複数層のパターンが、一つのグループとして互いに結線されている。

【0015】本発明による小型モータは、好ましくは、上記複数層のパターンが、複数のグループに分割され、各グループのパターンが、互いに結線されている。

【0016】本発明による小型モータは、好ましくは、上記複数のグループのパターンのうち、一つのグループのパターンが、位置検出及び／または速度検出のために利用される。

【0017】本発明による小型モータは、好ましくは、上記ステータ基板上に、磁路構成用のヨーク層が形成されている。

【0018】本発明による小型モータは、好ましくは、上記ステータ基板上に形成されたパターンが、磁性体から構成されている。

【0019】

【作用】上記構成によれば、駆動用コイルが、ステータ基板の一面に、フォトリソグラフィ法により形成された複数層のパターンから形成されているので、フレキシブルプリントコイルに比較して、非常に薄型化されると共に、駆動用コイルを構成するパターンに関して、非常に高い寸法精度及び位置決め精度が得られることになる。

【0020】上記複数層のパターンが、一つのグループとして互いに結線されている場合には、駆動用コイルのターン数が同じ場合、個々のパターンの幅を広くすることが可能であり、コイル抵抗値が低減される。従って、より多くの駆動電流を駆動用コイルに流すことができる。

【0021】上記複数層のパターンが、複数のグループに分割され、各グループのパターンが、互いに結線されている場合には、抵抗値が大幅に低減できる複数組の駆動用コイルを構成することが可能となる。

【0022】上記複数のグループのパターンのうち、一つのグループのパターンが、位置検出及び／または速度検出のために利用される場合には、ロータの回転に伴いこのグループのパターンに誘起電圧が発生するため、この誘起電圧を検出して、適宜に処理し、ロータの位置検出及び／または回転速度検出を行う。

【0023】上記ステータ基板上に、磁路構成用のヨーク層が形成されている場合には、ロータマグネットの磁束が、このヨーク層を通過することになり、駆動用コイルとの鎖交磁束が増大する。したがって、ロータマグネットの磁束がより一層有効活用されることになる。

【0024】上記ステータ基板上に形成されたパターンが、磁性体から構成されている場合には、駆動用コイル

が磁性体であることから、ロータマグネットの磁束をこのパターンに集めることができるので、発生トルクが増大する。

【0025】

【実施例】以下、この発明の好適な実施例を図1乃至図15を参照しながら、詳細に説明する。尚、以下に述べる実施例は、本発明の好適な具体例であるから、技術的に好ましい種々の限定が付されているが、本発明の範囲は、以下の説明において特に本発明を限定する旨の記載がない限り、これらの態様に限られるものではない。

【0026】図1及び図2は、本発明による小型モータの第一の実施例を示している。すなわち、図1及び図2において、小型モータ10は、平坦なステータ11と、このステータ11の中心付近に形成された軸受部11aの下部に備えられた軸受12と、この軸受部11a及び軸受12により回転可能に支持された回転軸13と、この回転軸13に固定されたロータ14とから構成されている。

【0027】上記軸受部11aは、回転軸13を径方向に支持するようになっており、また軸受12は、回転軸を軸方向に支持するように、スラスト軸受として構成されている。

【0028】上記ロータ14は、ステータ11の一面（図示の場合、上面）に対向するように配設されていると共に、その下面に備えられた環状のロータマグネット14aを有している。このロータマグネット14aは、図示の場合、別体に構成され、ロータ14の下面に固定されているが、ロータ14の下面に対して直接に、例えばスパッタ法等により形成されていてもよい。また、ロータ14は、回転軸13と一体に形成されていてもよい。

【0029】ここで、ロータマグネット14aは、円周方向に沿ってN極、S極が交互に並ぶように、多極着磁されている。

【0030】これに対して、ステータ11は、ベース15上に載置されたステータ基板16を備えている。このステータ基板16は、例えば図3に示すように、フォトリソグラフィ法によって、その表面に駆動用コイル17及び電極18等が形成されている。ここで、このステータ11は、ロータマグネット14aの磁力を有効利用するように、駆動用コイル17に鎖交する磁束を増大させるため、好ましくは、ベース15が磁性体から形成され、またはステータ基板16の全体またはロータマグネット14aに対向する領域が、磁性体から形成されていることにより、磁路形成用ヨークとして作用することになる。

【0031】図3において、ステータ基板16への駆動用コイル17及び電極18等の形成工程を順次に説明する。先づ、工程1においては、ステータ基板16の表面に第一の絶縁層20が形成される。この場合、絶縁層2

0の形成は、例えば $\text{SiO}_2$ や $\text{Si}_3\text{N}_4$ 等を使用して、PVD (Physical Vapor Deposition) 法、CVD (Chemical Vapor Deposition) 法等により、あるいは樹脂コーティングにより、行なわれる。また、ステータ基板16が $\text{Si}$ 基板のように材料の酸化物が絶縁体である場合には、ステータ基板16を酸性雰囲気中にて、高温に熱することにより、絶縁層20が形成される。

【0032】続いて、工程2においては、絶縁層20の上に、駆動用コイルや結線パターンとなるべき第一の導電層21が形成される。この場合、導電層21は、例えば銅、アルミニウム、金、ニッケル等の導電体を、PVD法やメッキ等により、形成する。

【0033】次に、工程3において、第一の導電層21の上から、高分子樹脂材料であるフォトレジスト22が塗布され、工程4にて、図4に示す第一のフォトマスク30を使用して、露光される。この場合、第一のフォトマスク30は、図示のように、駆動用コイル17の一部、結線パターン及び電極18の部分に、それぞれ窓部30a、30b、30cを有するように、構成されている。

【0034】そして、工程5において、未露光の余分なフォトレジスト22が洗浄等により除去され、工程6において、フォトレジスト22の除去により露出した第一の導電層21の部分が、エッチングによって除去される。その後、工程7にて、上記第一の絶縁層20及び第一の導電層21に作用しない溶剤等を使用して、残留フォトレジスト22が除去される。かくして、所定のパターンを有する駆動用コイル17の一部、結線パターン及び電極18を構成すべき第一の導電パターン23が形成される。

【0035】続いて、工程8において、この第一の導電パターン23を覆うように、ステータ基板16の表面全体に、第二の絶縁層24が形成される。

【0036】そして、工程9において、図5に示す第二のフォトマスク31を使用して、この第二の絶縁層24に対して、通電用窓部24aが形成される。この場合、第二のフォトマスク31は、図5に示すように、第一の導電パターン23の各駆動用コイルの接続端子部及び電極18の部分に、それぞれ窓部31a、31bを有するように、構成されている。

【0037】次に、工程10において、図6に示す第三のフォトマスク32を使用して、上述した工程2乃至工程7と同様の手順によって、第二の絶縁層24の上から、第二の導電パターン25が形成される。この場合、第三のフォトマスク32は、図示のように、駆動用コイル17の一部、結線パターン及び電極18の部分に、それぞれ窓部32a、32b、32cを有するように、構成されている。

【0038】続いて、工程11において、第二の導電パ

ターン25の上から、導電性ゴミの付着によるパターンショートや導電層の酸化を防止するため、ステータ基板16の表面全体を覆うように、パターン保護用の第三の絶縁層26が形成される。

【0039】最後に、工程12において、図7に示す第四のフォトマスク33を使用して、第三の絶縁層26に対して、給電用窓部26aが形成される。この場合、第四のフォトマスク33は、第一及び第二の導電パターン23、25の電極18の部分に窓部33aを有するように、構成されている。

【0040】かくして、第一の導電パターン23及び第二の導電パターン25により構成される駆動用コイル17は、上下に重なる第一の導電パターン23及び第二の導電パターン25のコイルパターンによる複数個、図示の場合6個のコイルが、それぞれ互いに図8に示すように、結線されている。これにより、互いに半径方向反対側に位置する駆動用コイルが直列に接続されると共に、直列に接続された三相、すなわちU相、V相及びW相の各相の駆動用コイルのうち、一方の駆動用コイルの他側が互いに接続され、また他方の駆動用コイルの他側が、それぞれ電極18の一つに接続されることになり、三相の駆動用コイル17が構成されている。

【0041】本実施例による小型モータ10は、以上のように構成されており、図1及び図2で示すように、ステータ基板16上の各駆動用コイル17に対して電極18からそれぞれ通電することにより、この駆動用コイル17に発生する磁界が、ロータマグネット14aの各N極及びS極に対して作用する。これにより、ロータ14が、回転軸13の周りで回転駆動する。

【0042】本実施例によれば、駆動用コイル17が、ステータ基板16の一面に、順次にフォトリソグラフィ法により形成された複数層のパターン23、25から形成されているので、フレキシブルプリントコイルに比較して、非常に薄型化されると共に、駆動用コイル17を構成するパターンに関して、非常に高い寸法精度及び位置決め精度が得られることになる。したがって、製造時の精度低下によって生じるモータの特性劣化が極めて少なくなる。また、このパターン23、25は、例えば銅、アルミニウム、金、ニッケル等の導電体層により形成されるので、微細に且つ低抵抗で構成されることになる。

【0043】従って、例えば駆動用コイル17のターン数が同じ場合、従来のステータ基板上に導電パターンにより平面的に駆動用コイルを形成したものと比較して、本実施例によれば、複数層のパターン23、25により駆動用コイル17が形成されるため、個々のパターン23、25の幅を広くすることが可能であり、コイル抵抗値が低減される。従って、より多くの駆動電流を駆動用コイルに流すことができるので、発生トルクが増大することになる。

【0044】また、コイル抵抗値を同じにした場合には、コイルターン数をより多くすることができるので、同様に発生トルクが増大することになる。さらに、駆動用コイル17は、従来のように、接着したり、電氣的接続のためにハンダ付けする必要がない。また、大きなステータのベース上に、半導体素子の製造の場合と同様に一度に大量の駆動用コイルのパターンを形成し、後から個々のステータ基板に切断することによって、量産も可能となる。したがって、作業効率が高められ、コストも低減されることになる。

【0045】ところで、上記実施例においては、駆動用コイル17は、ステータ基板16上にフォトリソグラフィ法により形成された第一の導電パターン23及び第二の導電パターン25から構成された一グループAのコイルから構成されている。そして、図9に示すように、ステータ基板16上に、第一のグループAのコイルを形成した後、図3の工程2から12を繰り返すことにより、第一のグループAのコイルの上に、第二のグループBのコイルが形成される。この場合、第二のグループBの各コイルも、図8に示す第一のグループAと同様に、互いに接続され、且つ電極18に接続されるので、第一のグループA及び第二のグループBは、全体として図10に示すように接続されることになる。

【0046】ここで、各相すなわちU相、V相及びW相の各コイルは、図11の等価回路に示すように、それぞれ互いに直列に接続される第一のグループ及び第二のグループの二つのコイルが、さらに並列に接続されることになる。これにより、各相におけるコイルは、図8に示す場合に比較して、半分の抵抗値になる。したがって、積層された第一のグループA及び第二のグループBのコイルを備える駆動用コイルによれば、パターンの幅を狭くして、ターン数を多くしても、コイル抵抗値が低く押されられ得るので、大きなトルクが得られることになる。

【0047】また、上記のように積層された第一のグループA及び第二のグループBのコイルを備えている場合、第一のグループAのみを、図8の場合と同様に、電極18に対して結線して、駆動用コイルとして利用し、第二のグループBを電極18とは別の電極に接続するようにして、この別の電極を検出電極として、ロータ14の回転に伴って第二のグループBに発生する誘起電圧を検出するようにしてもよい。この場合、第二のグループBに発生する電圧を検出することにより、ロータ14の回転位置検出及び／または回転速度検出が行なわれる。

【0048】さらに、この第二グループBのパターンが微細であることから、ロータ14の回転位置検出及び／または回転速度検出がより高精度で行われる。しかも、この第二グループBのパターンはロータ14の全周に対応して配設されているため、フルタイムの検出も可能になる。

【0049】図12は、本発明による小型モータの第二の実施例を示している。すなわち、図12において、小型モータ40は、平坦なステータ41と、このステータ41の中心付近に形成された軸受部41aの下部に備えられた軸受42と、この軸受部41a及び軸受42により回転可能に支持された回転軸43と、この回転軸43に固定されたロータ44とから構成されている。

【0050】上記軸受部41aは、回転軸43を径方向に支持するようになっており、また軸受42は、回転軸を軸方向に支持するように、スラスト軸受として構成されている。

【0051】上記ロータ44は、ステータ41の一面（図示の場合、上面）に対向するように配設されていると共に、その下面に備えられた環状のロータマグネット44aを有している。このロータマグネット44aは、図示の場合、別体に構成され、ロータ44の下面に固定されているが、ロータ44の下面に対して直接に、例えばスパッタ法等により形成されていてもよい。また、ロータ44は、回転軸43と一体に形成されていてもよい。

【0052】ここで、ロータマグネット44aは、円周方向に沿ってN極、S極が交互に並ぶように、多極着磁されている。

【0053】これに対して、ステータ41は、ベース45上に設けられた磁性体から成るステータヨーク46と、その上に設けられたステータ基板47を備えている。このステータ基板47は、前述したステータ基板16と同様に、例えば図3に示すように、フォトリソグラフィ法によって、その表面に駆動用コイル48及び電極（図示せず）等が形成されている。

【0054】この場合、ステータ41のベース45及びステータ基板47は、非磁性体から構成されているため、ロータマグネット44aの磁力を有効利用し、駆動用コイル47に鎖交する磁束を増大させる必要がある。このため、磁性体から成るステータヨーク46が設けられている。

【0055】また、上記ステータヨーク46を設ける代わりに、ステータ基板47が、図13に示すように、第一の絶縁層50の下に磁性層49を備えるようにしてもよい。

【0056】ここで、図12における、ステータ基板47への磁性層、駆動用コイル48及び電極等の形成工程を図13を用い順次に説明する。先づ、工程1においては、ステータ基板47の表面に、バックヨークとして作用する磁性層49が形成される。この磁性層49の形成は、例えばニッケル、ソフトフェライト等の磁性体をPVD法等により、行なわれる。次に、工程2においては、ステータ基板47の表面に第一の絶縁層50が形成される。この場合、絶縁層50の形成は、例えばSiO<sub>2</sub>やSi<sub>3</sub>N<sub>4</sub>等を使用して、PVD法、CVD法等に

より、あるいは樹脂コーティングにより、行なわれる。また、ステータ基板47がS1基板のように材料の酸化物が絶縁体である場合には、ステータ基板47を酸化性雰囲気中にて、高温に熱することにより、絶縁層50が形成され得る。

【0057】続いて、工程3においては、絶縁層50の上から、駆動用コイルや結線パターンとなるべき第一の導電層51が形成される。この場合、導電層51は、例えば銅、アルミニウム、金、ニッケル等の導電体を、PVD法やメッキ等により、形成される。

【0058】次に、工程4において、第一の導電層51の上から、高分子樹脂材料であるフォトレジスト52が塗布され、工程5にて、図4に示す第一のフォトマスク30を使用して、露光される。

【0059】そして、工程6において、未露光の余分なフォトレジスト52が洗浄等により除去され、工程7において、フォトレジスト52の除去により露出した第一の導電層51の部分が、エッチングによって除去される。その後、工程8にて、上記第一の絶縁層50及び第一の導電層51に作用しない溶剤等を使用して、残留フォトレジスト52が除去される。かくして、所定のパターンを有する駆動用コイル48の一部、結線パターン及び電極を構成すべき第一の導電パターン53が形成されることになる。

【0060】続いて、工程9において、この第一の導電パターン53を覆うように、ステータ基板47の表面全体に、第二の絶縁層54が形成される。

【0061】そして、工程10において、図5に示す第二のフォトマスク31を使用して、この第二の絶縁層54に対して、通電用窓部54aが形成される。

【0062】次に、工程11において、図6に示す第三のフォトマスク32を使用して、上述した工程3乃至工程8と同様の手順によって、第二の絶縁層54の上から、第二の導電パターン55が形成される。

【0063】続いて、工程12において、第二の導電パターン55の上から、導電性ゴミの付着によるパターンショートや導電層の酸化を防止するため、ステータ基板47の表面全体を覆うように、パターン保護用の第三の絶縁層56が形成される。

【0064】最後に、工程13において、図7に示す第四のフォトマスク33を使用して、第三の絶縁層56に対して、給電用窓部56aが形成される。

【0065】かくして、第一の導電パターン53及び第二の導電パターン55により構成される駆動用コイル48は、上下に重なる第一の導電パターン53及び第二の導電パターン55のコイルパターンによる複数個、図示の場合6個のコイルが、それぞれ互いに図8に示すように、結線されている。これにより、互いに半径方向反対側に位置する駆動用コイルが直列に接続されると共に、直列に接続された三相、すなわちU相、V相及びW相の

各相の駆動用コイルのうち、一方の駆動用コイルの他側が互いに接続され、また他方の駆動用コイルの他側が、それぞれ電極18の一つに接続されることになり、三相の駆動用コイル47が構成されている。

【0066】このような構成の小型モータ40によれば、ステータ基板47上の各駆動用コイル47に対して電極からそれぞれ通電することにより、この駆動用コイル47に発生する磁界が、ロータマグネット44aの各N極及びS極に対して作用する。これにより、ロータ44が、回転軸43の周りで回転駆動する。

【0067】さらに、ステータ基板47の下に配設されたステータヨーク46またはステータ基板47上に形成された磁性層49が、バックヨークとして作用することにより、ロータマグネット44aの磁束が、有効利用されることになる。なお、磁性層49の場合には、バックヨークとロータリマグネット44aとの間のギャップがより狭いので、ロータマグネット44aのコイルとの鎖交磁束がより一層増大されることになる。

【0068】この場合も、図9に示したステータ基板と同様にして、ステータ基板47上に、第一のグループAのコイルを形成した後、図13の工程3から13を繰り返すことにより、図14に示すように、第一のグループAのコイルの上に、第二のグループBのコイルが形成されてもよい。

【0069】これにより、各相すなわちU相、V相及びW相の各コイルは、それぞれ互いに直列に接続される第一のグループ及び第二のグループの二つのコイルが、さらに並列に接続される場合には、各相におけるコイルは、第一のグループAのコイルのみの場合に比較して、半分の抵抗値になる。また、例えば第二のグループBのコイルのみが、駆動電圧が印加される電極とは別の電極に接続され、この別の電極を検出電極として、ロータ44の回転に伴って第二のグループBに発生する誘起電圧を検出する場合には、ロータ44の回転位置検出及び/または回転速度検出が行なわれる。

【0070】図15は、本発明による小型モータの第三の実施例を示している。すなわち、図15において、小型モータ60は、平坦なステータ61と、このステータ61の中心付近に備えられた軸受62a、62bと、この軸受62a、62bにより回転可能に支持された回転軸63と、この回転軸63に固定されたロータ64とから構成されている。

【0071】上記軸受62aは、回転軸63を径方向に支持するようになっており、また軸受62bは、回転軸を軸方向に支持するように、スラスト軸受として構成されている。本実施例による小型モータ60は、この軸受62aが備えられている点のみ、図1及び図2に示した小型モータ10とは異なる構成である。

【0072】上記ロータ64は、ステータ61の一面（図示の場合、上面）に対向するように配設されている

と共に、その下面に備えられた環状のロータマグネット64aを有している。このロータマグネット64aは、図示の場合、別体に構成され、ロータ64の下面に固定されているが、ロータ64の下面に対して直接に、例えばスパッタ法等により形成されていてもよい。また、ロータ64は、回転軸63と一体に形成されていてもよい。

【0073】ここで、ロータマグネット64aは、円周方向に沿ってN極、S極が交互に並ぶように、多極着磁されている。

【0074】これに対して、ステータ61は、ベース65上に載置されたステータ基板66を備えている。このステータ基板66は、例えば図3に示すように、フォトリソグラフィ法によって、その表面に駆動用コイル67及び電極（図示せず）等が形成されている。ここで、このステータ61は、ロータマグネット64aの磁力を有効利用するように、駆動用コイル67に鎖交する磁束を増大させるため、好ましくは、ベース65が磁性体から形成され、またはステータ基板66の全体またはロータマグネット64aに対向する領域が、磁性体から形成されていることにより、磁路形成用ヨークとして作用することになる。

【0075】このような構成の小型モータ60によれば、ステータ基板66上の各駆動用コイル67に対して電極からそれぞれ通電することにより、この駆動用コイル67に発生する磁界が、ロータマグネット64aの各N極及びS極に対して作用する。これにより、ロータ64が、回転軸63の周りで回転駆動する。

【0076】ここで、ステータ基板66上の駆動用コイル67は、フォトリソグラフィ法によって、形成されているので、コイル巻線の寸法精度及び位置決め精度が極めて高く、したがって、製造時の精度低下によって生じるモータの特性劣化が極めて少なくなる。また、駆動用コイル67の相互の結線及び電極に対する結線が、フォトリソグラフィ法により、駆動用コイル67と同時に形成されるので、駆動用コイル67のステータ基板66上への接合作業や、コイル巻線端末の電極に対するハンダ付け作業が不要であることから、作業効率が向上し、組立コストが大幅に低減されることになる。

【0077】この場合、駆動用コイル67は、第一の導電パターン23及び第二の導電パターン25の二層のパターンによって構成されているので、従来フレキシブルプリントコイルの場合に比較して、パターンの幅が広く形成される。したがって、コイル抵抗値が低減されるので、大きな駆動電流を流すことが可能である。このため、十分なトルクが得られることになる。

【0078】尚、上記実施例においては、駆動用コイルは、一グループまたは積層された二グループのコイルから構成されているが、これに限らず、駆動用コイルは、さらに、第三、第四のグループのコイルを積層すること

により、複数グループのコイルから構成されていてもよい。これにより、各グループのコイルを互いに並列に接続した場合には、コイルの合成抵抗値はさらに低減されることになる。

【0079】また、複数グループのコイルのうちのグループのコイルのみを、別の電極に接続して、当該グループのコイルに発生する誘起電圧を検出することにより、ロータ64の回転位置検出及び／または回転速度検出が行なわれるようにしてもよい。

#### 10 【0080】

【発明の効果】以上述べたように、本発明によれば、駆動用コイルが小型且つ高精度に形成されると共に、十分なモータトルクが得られるようにした、極めて優れた小型モータが提供されることになる。

【図面の簡単な説明】

【図1】本発明による小型モータの第一の実施例を示す一部破断平面図である。

【図2】図1の小型モータの概略断面図である。

【図3】図1の小型モータにおけるステータ基板の製造工程の一例を順次に示す工程図である。

【図4】図3の第一の導電層形成工程で使用されるマスクを示す平面図である。

【図5】図3の通電穴形成工程で使用されるマスクを示す平面図である。

【図6】図3の第二の導電層形成工程で使用されるマスクを示す平面図である。

【図7】図3の給電用電極形成工程で使用されるマスクを示す平面図である。

【図8】図1の小型モータにおける駆動用コイルの結線の一例を示す回路図である。

【図9】図1の小型モータにおけるステータ基板の他の構成例を示す断面図である。

【図10】図9のステータ基板における駆動用コイルの結線の一例を示す回路図である。

【図11】図10の結線によるコイルの等価回路図である。

【図12】本発明による小型モータの第二の実施例を示す概略断面図である。

【図13】図1の小型モータにおけるステータ基板の製造工程の他の例を順次に示す工程図である。

【図14】図1の小型モータにおけるステータ基板の製造工程のさらに他の例を示す断面図である。

【図15】本発明による小型モータの第三の実施例を示す概略断面図である。

【図16】従来の小型モータの一例を示す概略断面図である。

【符号の簡単な説明】

10 小型モータ

11 ステータ

50 11a 軸受部




(8)

特開平8-154352


13

- 12 軸受
- 13 回転軸
- 14 ロータ
- 14 a ロータマグネット
- 15 ベース
- 16 ステータ基板
- 17 駆動用コイル
- 18 電極
- 20 絶縁層
- 21 第一の導電層
- 22 フォトレジスト
- 23 第一の導電パターン
- 24 第二の絶縁層
- 25 第二の導電パターン
- 26 第三の絶縁層
- 30, 31, 32, 33 フォトマスク
- 40 小型モータ
- 41 ステータ
- 41 a 軸受部
- 42 軸受
- 43 回転軸
- 44 ロータ

【図1】

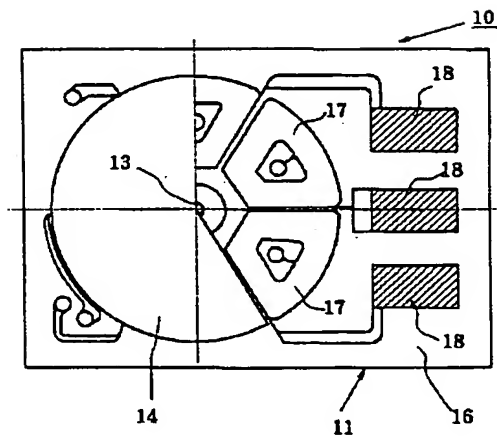


【図8】

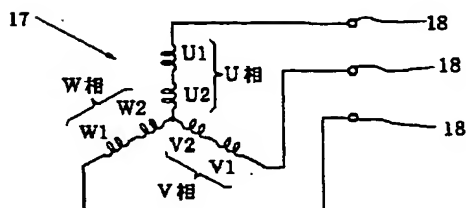


14

- 44 a ロータマグネット
- 45 ベース
- 46 ステータヨーク
- 47 ステータ基板
- 48 駆動用コイル
- 49 磁性層
- 50 絶縁層
- 51 第一の導電層
- 52 フォトレジスト
- 10 53 第一の導電パターン
- 54 第二の絶縁層
- 55 第二の導電パターン
- 56 第三の絶縁層
- 60 小型モータ
- 61 ステータ
- 62 a, 62 b 軸受部
- 63 回転軸
- 64 ロータ
- 64 a ロータマグネット
- 20 65 ベース
- 66 ステータ基板
- 67 駆動用コイル


【図2】

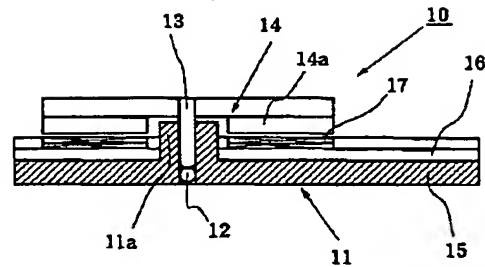


【図14】




【図9】




【図3】

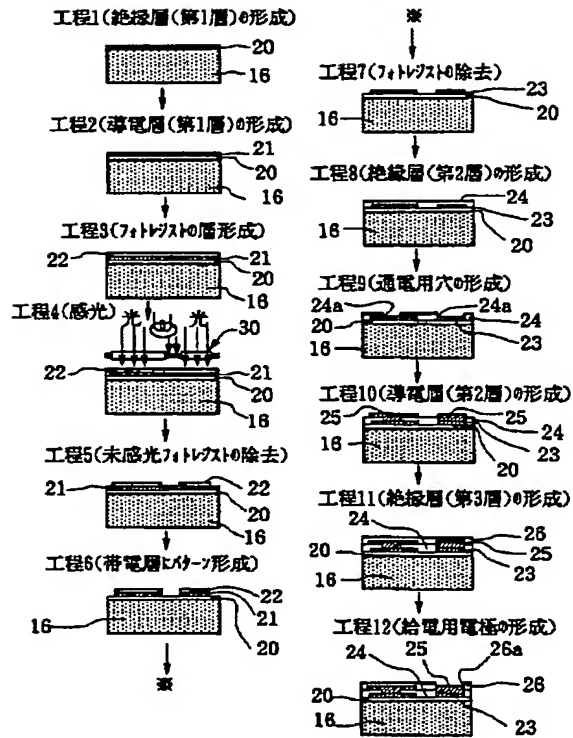


【図4】

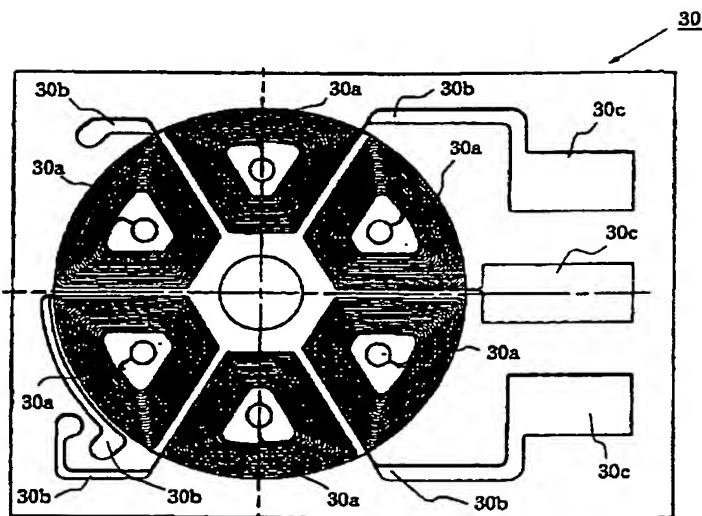


【図10】

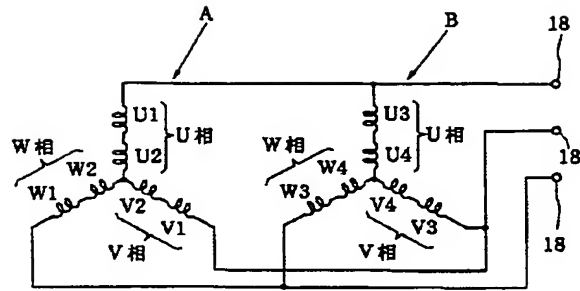


【図11】

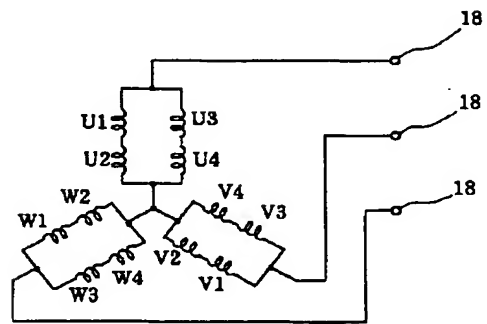

【図15】

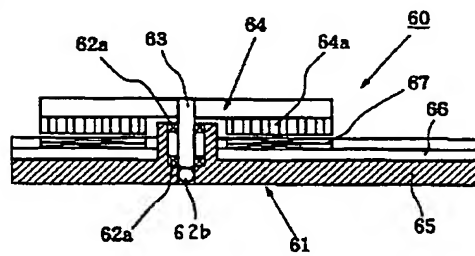


【図16】

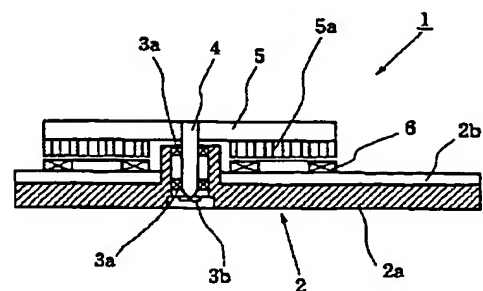





【図5】

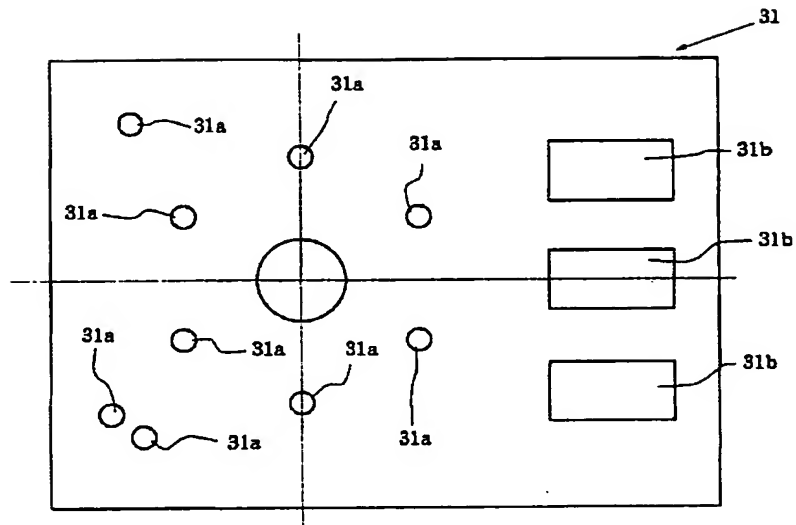


【図6】

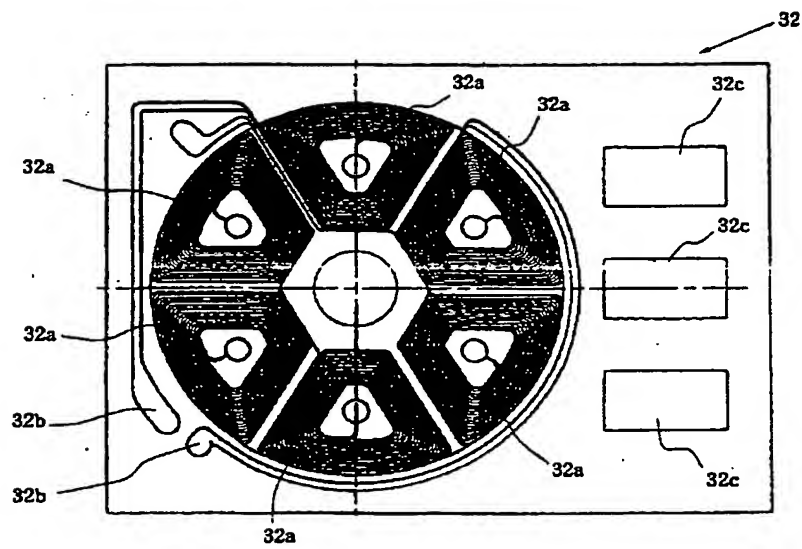


【図7】

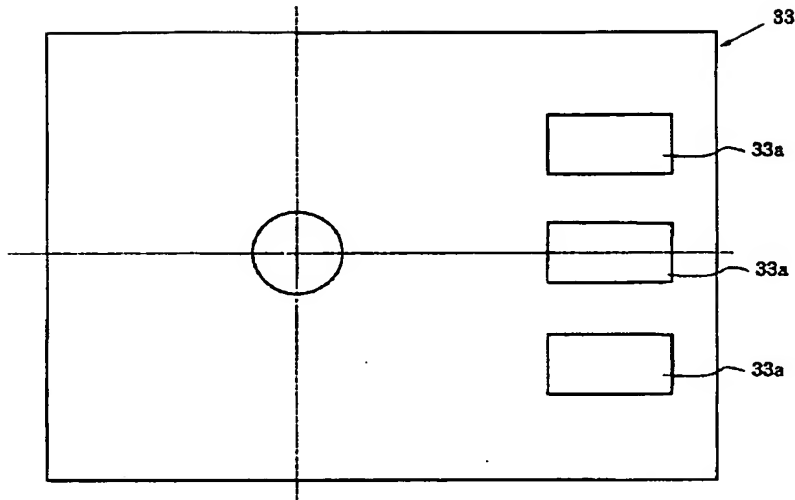

【図12】

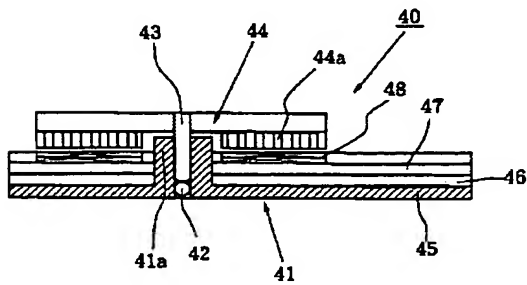

【図13】

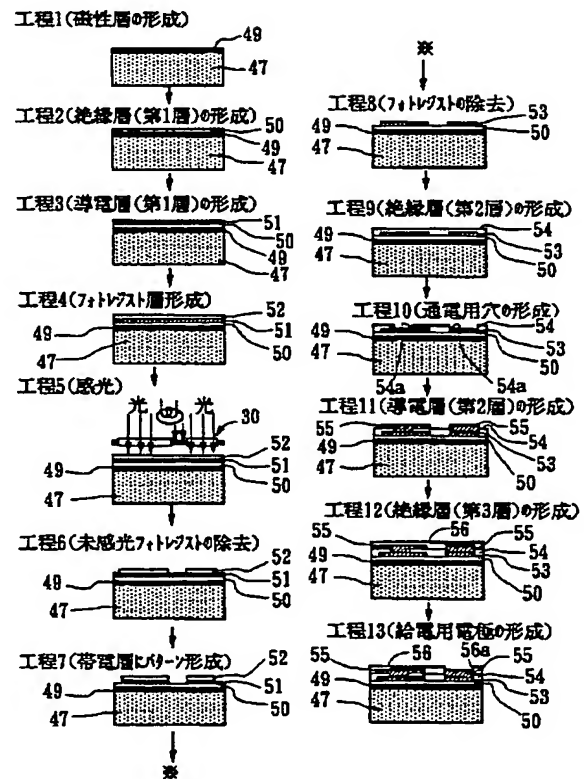

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**